



N Tail



0NI4



Swaged Ferrule 4WS (no skive)

90

0NI6



Swaged Ferrule (no skive)

90



0370N



NPTF Male 60° cone

91



0350N



BSP Male Parallel 60° cone

91

0050N 0051N



BSP Female 60° Cone

92

0150N 0151N



BSP 90° Swept elbow 60° cone

93

0250N 0251N



BSP 45° Swept Elbow 60° Cone

94



0850N



JIC Male 74° cone

95

0900N 0901N



JIC Female 74° Cone-Double Hexagon

96

0950N 0951N



JIC 90° Swept Elbow 74° cone

97

095SN



JIC 90° Swept Elbow 74° cone - ISO SHORT

97

1000N 1001N



JIC 45° Swept Elbow 74° cone

98



0500N



Metric Male 24° Seat
Light

99

0085N



Metric Female 24° Seat
Light

100

0185N



90° Metric Swept Elbow
24° Seat Light

100

0285N



45° Metric Swept Elbow
24° Seat Light

101



0450N



Metric Male 24° Seat
Heavy

101

0084N



Metric Female 24° Seat
Heavy

102

0184N



90° Metric Swept Elbow
24° Seat Heavy

102

0284N



45° Metric Swept Elbow
24° Seat Heavy

103



S350N



ORFS Male

104

S05TN



ORFS Female Back
Hexagon

104

S15SN



ORFS 90° Swept Elbow -
ISO SHORT

105

S250N



ORFS 45° Swept Elbow

105



S150N



ORFS 90° Swept Elbow

106

1250N



Straight SAE Flange
3000 PSI

107

1050N



90° SAE Flange 3000 PSI

107



1150N



45° SAE Flange 3000 PSI

108

1300N



Straight SAE Flange
6000 PSI

108

1100N



90° SAE Flange 6000 PSI

109



1200N



45° SAE Flange 6000 PSI

110

130SN



Straight 'CAT' Flange

110

110SN



90° 'CAT' Flange

111




120SN



45° 'CAT' Flange

112


ONI4



Swaged Ferrule 4WS (no skive)


Product number	hose I.D.		Dimension		skive	valid for
	in	mm	D	L	Length	-
ONI4-06	3/8	9.5	30.5	37	NO	SR-ISO
ONI4-08	1/2	12.7	33.5	37.5	NO	SR-ISO
ONI4-10	5/8	15.9	37.5	46	NO	SR-ISO
ONI4-12	3/4	19	44.5	50.5	NO	SR-ISO
ONI4-16	1	25.4	52.5	59.5	NO	SR-ISO
ONI4-20	1.1/4	31.8	60.5	70	NO	SR-ISO
ONI4-24	1.1/2	38.1	69.5	80	NO	SR-ISO

ONI6

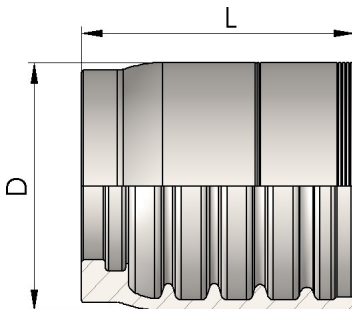


Swaged Ferrule (no skive)

Product number	hose I.D.		Dimension		skive	valid for
	in	mm	D	L	Length	-
ONI6-20	1.1/4	31.8	63.5	70	NO	SR-ISO
ONI6-24	1.1/2	38.1	72.5	80	NO	SR-ISO

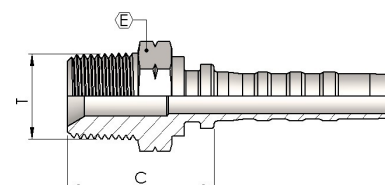
0370N**NPTF Male 60° cone****(AGN)**

Product number	hose I.D.		Dimension			
	in	mm	dash size	T	E	Cut-off C
0370N06-06	3/8	9.5	06	3/8-18	19	30
0370N06-08	3/8	9.5	06	1/2-14	22	36
0370N08-08	1/2	12.7	08	1/2-14	22	36
0370N12-12	3/4	19	12	3/4-14	27	39
0370N16-16	1	25.4	16	1-11.1/2	36	46
0370N20-20	1.1/4	31.8	20	1.1/4-11.1/2	46	50
0370N24-24	1.1/2	38.1	24	1.1/2-11.1/2	50	54

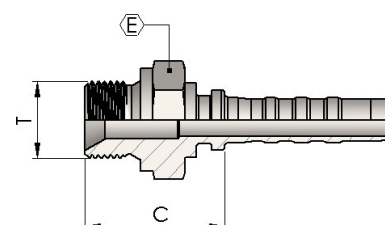0350N**BSP Male Parallel 60° cone****(AGR)**

Product number	hose I.D.		Dimension			
	in	mm	dash size	T	E	Cut-off C
0350N06-06	3/8	9.5	06	3/8-19	22	31
0350N06-08	3/8	9.5	06	1/2-14	27	34
0350N08-08	1/2	12.7	08	1/2-14	27	34
0350N10-10	5/8	15.9	10	5/8-14	30	37
0350N10-12	5/8	15.9	10	3/4-14	32	37
0350N12-12	3/4	19	12	3/4-14	32	38
0350N12-16	3/4	19	12	1-11	41	41
0350N16-16	1	25.4	16	1-11	41	42
0350N16-20	1	25.4	16	1.1/4-11	50	46
0350N20-20	1.1/4	31.8	20	1.1/4-11	50	48
0350N24-24	1.1/2	38.1	24	1.1/2-11	55	51

0050N 0051N




BSP Female 60° Cone

(DKR)

Product number	hose I.D.		Dimension				Note
	in	mm	dash size	T	E	Cut-off C	
0051N06-06	3/8	9.5	06	3/8-19	22	21	
0051N06-08	3/8	9.5	06	1/2-14	27	24	
0051N08-08	1/2	12.7	08	1/2-14	27	24	
0051N10-10	5/8	15.9	10	5/8-14	30	22	
0050N10-12	5/8	15.9	10	3/4-14	32	27	
0050N12-12	3/4	19	12	3/4-14	32	27	
0050N12-16	3/4	19	12	1-11	41	28	
0050N16-16	1	25.4	16	1-11	41	30	
0050N20-20	1.1/4	31.8	20	1.1/4-11	50	34	(*)
0050N20-24	1.1/4	31.8	20	1.1/2-11	55	36	(*)
0050N24-24	1.1/2	38.1	24	1.1/2-11	55	39	(*)


(*) - Femmina BSP con O-Ring.



O-Ring


0150N 0151N

BSP 90° Swept elbow 60° cone

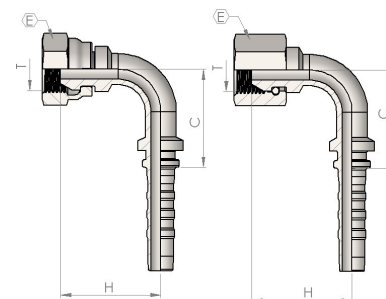


Product number	hose I.D.		Dimension					Note
	in	mm	dash size	T	E	drop H	Cut-off C	
0151N06-06	3/8	9.5	06	3/8-19	22	35	33	
0151N06-08	3/8	9.5	06	1/2-14	27	40	31	
0151N08-08	1/2	12.7	08	1/2-14	27	41	39	
0151N10-10	5/8	15.9	10	5/8-14	30	43	44	
0150N10-12	5/8	15.9	10	3/4-14	32	50	45	
0150N12-12	3/4	19	12	3/4-14	32	57	59	
0150N16-16	1	25.4	16	1-11	41	70	78	
0150N16-20	1	25.4	16	1.1/4-11	50	76	77	(*)
0150N20-20	1.1/4	31.8	20	1.1/4-11	50	84	97	(*)
0150N24-24	1.1/2	38.1	24	1.1/2-11	55	104	110	(*)

(*) - BSP O-Ring Female



0250N 0251N





BSP 45° Swept Elbow 60° Cone

(DKR-45°)

Product number	hose I.D.		Dimension					Note
	in	mm	dash size	T	E	drop H	Cut-off C	
0251N06-06	3/8	9.5	06	3/8-19	22	19	54	
0251N06-08	3/8	9.5	06	1/2-14	27	21	57	
0251N08-08	1/2	12.7	08	1/2-14	27	24	66	
0251N10-10	5/8	15.9	10	5/8-14	30	23	70	
0250N10-12	5/8	15.9	10	3/4-14	32	27	74	
0250N12-12	3/4	19	12	3/4-14	32	28	88	
0250N16-16	1	25.4	16	1-11	41	38	116	
0250N16-20	1	25.4	16	1.1/4-11	50	33	70	(*)
0250N20-20	1.1/4	31.8	20	1.1/4-11	50	41	103	(*)
0250N24-24	1.1/2	38.1	24	1.1/2-11	55	54	172	(*)


(*) - BSP O-Ring Female



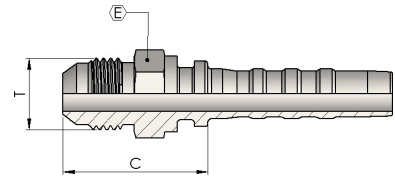0850N**JIC Male 74° cone****(AGJ)**

Product number	hose I.D.		Dimension			
	in	mm	dash size	T	E	Cut-off C
0850N06-06	3/8	9.5	06	9/16-18	15	29
0850N06-08	3/8	9.5	06	3/4-16	19	32
0850N08-08	1/2	12.7	08	3/4-16	19	32
0850N08-10	1/2	12.7	08	7/8-14	24	36
0850N08-12	1/2	12.7	08	1.1/16-12	27	38
0850N10-10	5/8	15.9	10	7/8-14	24	37
0850N12-12	3/4	19	12	1.1/16-12	27	40
0850N16-16	1	25.4	16	1.5/16-12	34	45
0850N20-20	1.1/4	31.8	20	1.5/8-12	42	50
0850N24-24	1.1/2	38.1	24	1.7/8-12	55	52


0900N 0901N




JIC Female 74° Cone- Double Hexagon

(DKJ)

Product number	hose I.D.		Dimension					
	in	mm	dash size	T	E	E1	Cut-off C	A
0901N06-06	3/8	9.5	06	9/16-18	19	17	26	9
0901N06-08	3/8	9.5	06	3/4-16	24	19	28	10.5
0901N08-08	1/2	12.7	08	3/4-16	24	22	28	10.5
0901N08-10	1/2	12.7	08	7/8-14	27	22	28	13
0900N08-12	1/2	12.7	08	1.1/16-12	32	27	33	13.5
0901N10-10	5/8	15.9	10	7/8-14	27	22	28	13
0900N12-12	3/4	19	12	1.1/16-12	32	27	34	13.5
0900N16-16	1	25.4	16	1.5/16-12	38	36	35	15.5
0900N20-20	1.1/4	31.8	20	1.5/8-12	50	46	42	16.5
0900N24-24	1.1/2	38.1	24	1.7/8-12	55	50	46	19

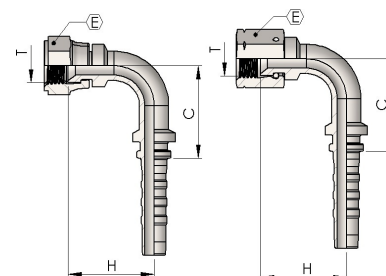0950N 0951N**JIC 90° Swept Elbow 74° cone**


Product number	hose I.D.		Dimension				
	in	mm	dash size	T	E	drop H	Cut-off C
0951N06-06	3/8	9.5	06	9/16-18	19	32	31
0951N06-08	3/8	9.5	06	3/4-16	24	34	35
0951N08-08	1/2	12.7	08	3/4-16	24	41	41
0951N08-10	1/2	12.7	08	7/8-14	27	40	41
0950N08-12	1/2	12.7	08	1.1/16-12	32	43	39
0950N10-10	5/8	15.9	10	7/8-14	27	45	42
0950N12-12	3/4	19	12	1.1/16-12	32	54	56
0950N16-16	1	25.4	16	1.5/16-12	41	65	70
0950N20-20	1.1/4	31.8	20	1.5/8-12	50	85	82
0950N24-24	1.1/2	38.1	24	1.7/8-12	55	97	104

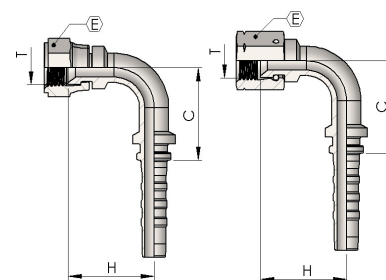095SN**JIC 90° Swept Elbow 74° cone - ISO SHORT**

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	E	drop H	Cut-off C
095SN06-06	3/8	9.5	06	9/16-18	19	23	31
095SN08-08	1/2	12.7	08	3/4-16	24	29	41
095SN12-12*	3/4	19	12	1.1/16-12	32	48	56
095SN16-16	1	25.4	16	1.5/16-12	41	57	71

*Thrust Wire Nut

1000N 1001N

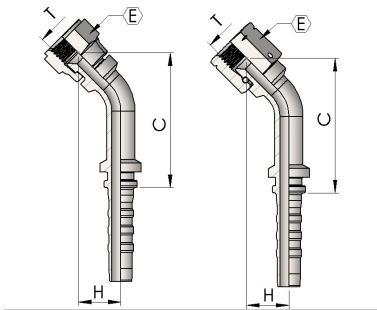


JIC 45° Swept Elbow 74°

(DKJ-45°)

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	E	drop H	Cut-off C
1001N06-06	3/8	9.5	06	9/16-18	19	17	51
1001N06-08	3/8	9.5	06	3/4-16	24	19	51
1001N08-08	1/2	12.7	08	3/4-16	24	22	62
1001N08-10	1/2	12.7	08	7/8-14	27	23	64
1000N08-12	1/2	12.7	08	1.1/16-12	32	25	68
1001N10-10	5/8	15.9	10	7/8-14	27	24	68
1000N12-12	3/4	19	12	1.1/16-12	32	28	84
1000N16-16	1	25.4	16	1.5/16-12	41	32	83
1000N20-20	1.1/4	31.8	20	1.5/8-12	50	42	108
1000N24-24	1.1/2	38.1	24	1.7/8-12	55	49	156


0500N

Metric Male 24° Seat Light
(CEL)

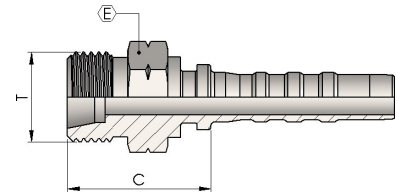

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	erm.	E	Cut-off C
0500N06-16	3/8	9.5	06	M16-1.5	10	17	23
0500N06-18	3/8	9.5	06	M18-1.5	12	19	24
0500N06-22	3/8	9.5	06	M22-1.5	15	22	25
0500N08-18	1/2	12.7	08	M18-1.5	12	19	25
0500N08-22	1/2	12.7	08	M22-1.5	15	22	26
0500N08-26	1/2	12.7	08	M26-1.5	18	27	27
0500N10-22	5/8	15.9	10	M22-1.5	15	22	26
0500N10-26	5/8	15.9	10	M26-1.5	18	27	27
0500N10-30	5/8	15.9	10	M30-2	22	30	32
0500N12-26	3/4	19	12	M26-1.5	18	27	28
0500N12-30	3/4	19	12	M30-2	22	30	33
0500N16-36	1	25.4	16	M36-2	28	36	32
0500N20-45	1.1/4	31.8	20	M45-2	35	46	36
0500N24-52	1.1/2	38.1	24	M52-2	42	55	38

0085N

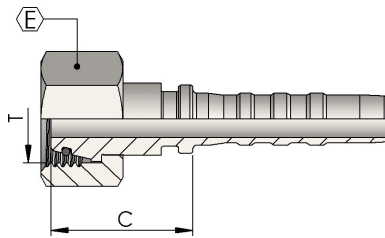


Metric Female 24° Seat Light

(DKOL)

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	erm.	E	Cut-off C
0085N06-18	3/8	9.5	06	M18-1.5	12	22	27
0085N08-22	1/2	12.7	08	M22-1.5	15	27	30
0085N10-26	5/8	15.9	10	M26-1.5	18	32	31
0085N12-30	3/4	19	12	M30-2	22	36	31
0085N16-36	1	25.4	16	M36-2	28	41	32
0085N20-45	1.1/4	31.8	20	M45-2	35	50	43
0085N24-52	1.1/2	38.1	24	M52-2	42	60	46


0185N

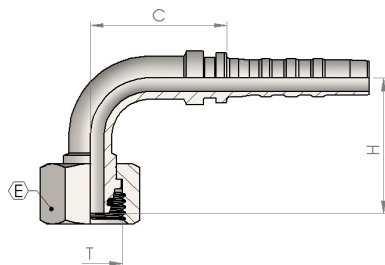


90° Metric Swept Elbow 24° Seat Light

(DKOL-90°)

Product number	hose I.D.		Dimension					
	in	mm	dash size	T	erm.	E	drop H	Cut-off C
0185N06-18	3/8	9.5	06	M18-1.5	12	22	33	34
0185N08-22	1/2	12.7	08	M22-1.5	15	27	41	41
0185N10-26	5/8	15.9	10	M26-1.5	18	32	44	44
0185N12-30	3/4	19	12	M30-2	22	36	52	58
0185N16-36	1	25.4	16	M36-2	28	41	62	72
0185N20-45	1.1/4	31.8	20	M45-2	35	50	73	63
0185N24-52	1.1/2	38.1	24	M52-2	42	60	83	81

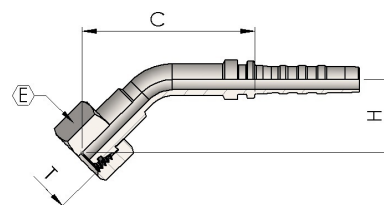
0285N**45° Metric Swept Elbow 24° Seat
Light****(DKOL-45°)**

Product number	hose I.D.		Dimension					
	in	mm	dash size	T	erm.	E	H	Cut-off C
0285N06-18	3/8	9.5	06	M18-1.5	12	22	19	52
0285N08-22	1/2	12.7	08	M22-1.5	15	27	21	63
0285N10-26	5/8	15.9	10	M26-1.5	18	32	23	68
0285N16-36	1	25.4	16	M36-2	28	41	29	82
0285N20-45	1.1/4	31.8	20	M45-2	35	50	39	107
0285N24-52	1.1/2	38.1	24	M52-2	42	60	36	85

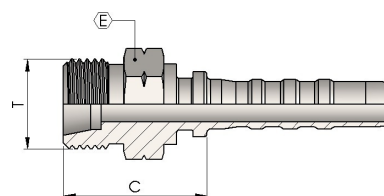0450N**Metric Male 24° Seat Heavy****(CES)**

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	erm.	E	Cut-off C
0450N06-20	3/8	9.5	06	M20-1.5	12	22	31
0450N08-24	1/2	12.7	08	M24-1.5	16	24	33
0450N10-30	5/8	15.9	10	M30-2	20	30	36
0450N12-30	3/4	19	12	M30-2	20	30	37
0450N12-36	3/4	19	12	M36-2	25	36	39
0450N16-42	1	25.4	16	M42-2	30	46	44
0450N20-52	1.1/4	31.8	20	M52-2	38	55	48
0450N24-52	1.1/2	38.1	24	M52-2	38	55	50

0084N

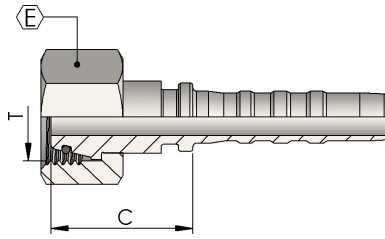


Metric Female 24° Seat Heavy

(DKOS)

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	erm.	E	Cut-off C
0084N06-20	3/8	9.5	06	M20-1.5	12	24	25
0084N08-24	1/2	12.7	08	M24-1.5	16	30	29
0084N10-30	5/8	15.9	10	M30-2	20	34	34
0084N12-30	3/4	19	12	M30-2	20	36	36
0084N12-36	3/4	19	12	M36-2	25	46	41
0084N16-36	1	25.4	16	M36-2	25	46	42
0084N16-42	1	25.4	16	M42-2	30	50	44
0084N20-52	1.1/4	31.8	20	M52-2	38	60	46
0084N24-52	1.1/2	38.1	24	M52-2	38	60	52


0184N

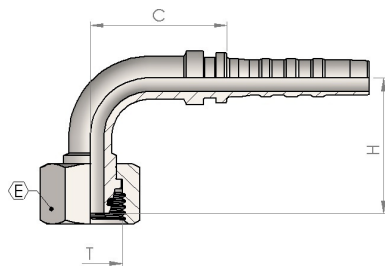

90° Metric Swept Elbow 24° Seat Heavy


(DKOS-90°)

Product number	hose I.D.		Dimension					
	in	mm	dash size	T	erm.	E	drop H	Cut-off C
0184N06-20	3/8	9.5	06	M20-1.5	12	24	34	34
0184N08-24	1/2	12.7	08	M24-1.5	16	30	41	40
0184N10-30	5/8	15.9	10	M30-2	20	36	50	46
0184N12-30	3/4	19	12	M30-2	20	36	56	58
0184N12-36	3/4	19	12	M36-2	25	46	57	59
0184N16-36	1	25.4	16	M36-2	25	46	67	77
0184N16-42	1	25.4	16	M42-2	30	50	67	72
0184N20-52	1.1/4	31.8	20	M52-2	38	60	82	84
0184N24-52	1.1/2	38.1	24	M52-2	38	60	105	105

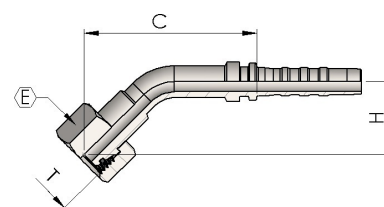0284N**45° Metric Swept Elbow 24° Seat
Heavy****(DKOS-45°)**

Product number	hose I.D.		Dimension					
	in	mm	dash size	T	erm.	E	drop H	Cut-off C
0284N06-20	3/8	9.5	06	M20-1.5	12	24	18	53
0284N08-24	1/2	12.7	08	M24-1.5	16	30	21	63
0284N10-30	5/8	15.9	10	M30-2	20	36	29	74
0284N12-30	3/4	19	12	M30-2	20	36	30	90
0284N12-36	3/4	19	12	M36-2	25	46	29	91
0284N16-36	1	25.4	16	M36-2	25	46	34	86
0284N16-42	1	25.4	16	M42-2	30	50	30	87
0284N20-52	1.1/4	31.8	20	M52-2	38	60	39	105
0284N24-52	1.1/2	38.1	24	M52-2	38	60	53	129

S350N

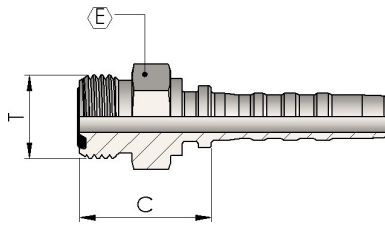


ORFS Male

(AGO)

Product number	hose I.D.		Dimension			
	in	mm	dash size	T	E	Cut-off C
S350N06-09	3/8	9.5	06	11/16-16	19	26
S350N06-11	3/8	9.5	06	13/16-16	22	29
S350N08-11	1/2	12.7	08	13/16-16	22	29
S350N10-13	5/8	15.9	10	1-14	27	33
S350N12-14	3/4	19	12	1.3/16-12	32	36
S350N16-15	1	25.4	16	1.7/16-12	38	37
S350N16-21	1	25.4	16	1.11/16-12	46	38
S350N20-21	1.1/4	31.8	20	1.11/16-12	46	39
S350N20-32	1.1/4	31.8	20	2-12	55	48.5
S350N24-32	1.1/2	38.1	24	2-12	55	52.5

- with plug and O-Ring


S05TN

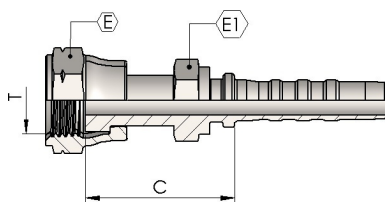


ORFS Female Back Hexagon

(ORFS)

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	E	E1	Cut-off C
S05TN06-09	3/8	9.5	06	11/16-16	22	17	36
S05TN06-11	3/8	9.5	06	13/16-16	24	19	38
S05TN08-11	1/2	12.7	08	13/16-16	24	19	38
S05TN10-13	5/8	15.9	10	1-14	30	24	43
S05TN12-14	3/4	19	12	1.3/16-12	36	30	44
S05TN16-15	1	25.4	16	1.7/16-12	41	36	52
S05TN20-21	1.1/4	31.8	20	1.11/16-12	50	46	56
S05TN24-32	1.1/2	38.1	24	2-12	60	50	62

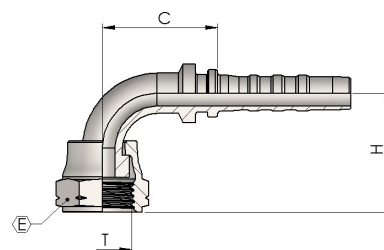
S15SN**ORFS 90° Swept Elbow - ISO SHORT****(ORFS-90° S)**

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	E	drop H	Cut-off C
S15SN06-09	3/8	9.5	06	11/16-16	22	23	35
S15SN08-11	1/2	12.7	08	13/16-16	24	29	44
S15SN10-13	5/8	15.9	10	1-14	30	32	47
S15SN12-14	3/4	19	12	1.3/16-12	36	48	58

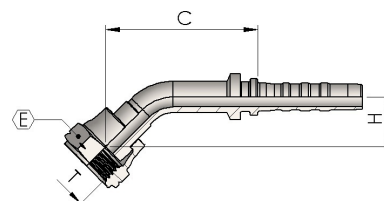S250N**ORFS 45° Swept Elbow****(ORFS-45°)**

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	E	drop H	Cut-off C
S250N06-09	3/8	9.5	06	11/16-16	22	17	52
S250N06-11	3/8	9.5	06	13/16-16	24	18	51
S250N08-11	1/2	12.7	08	13/16-16	24	20	62
S250N10-13	5/8	15.9	10	1-14	30	22	67
S250N12-14	3/4	19	12	1.3/16-12	36	23	84
S250N16-15	1	25.4	16	1.7/16-12	41	27	82
S250N20-21	1.1/4	31.8	20	1.11/16-12	50	44	104
S250N20-32	1.1/4	31.8	20	2-12	60	44	125
S250N24-32	1.1/2	38.1	24	2-12	60	44	127


S150N

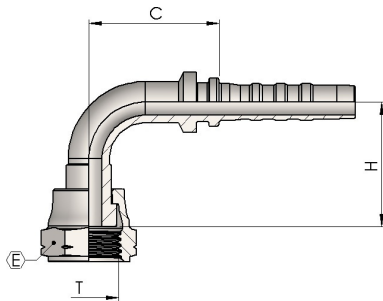


ORFS 90° Swept Elbow

(ORFS-90°)

Product number	hose I.D.		Dimension				
	in	mm	dash size	T	E	drop H	Cut-off C
S150N06-09	3/8	9.5	06	11/16-16	22	33	33
S150N06-11	3/8	9.5	06	13/16-16	24	32	33
S150N08-11	1/2	12.7	08	13/16-16	24	36	43
S150N10-13	5/8	15.9	10	1-14	30	42	46
S150N12-14	3/4	19	12	1.3/16-12	36	49	55
S150N16-15	1	25.4	16	1.7/16-12	41	62	80
S150N16-21	1	25.4	20	1.11/16-12	50	58	62
S150N20-21	1.1/4	31.8	20	1.11/16-12	50	58	96
S150N20-32	1.1/4	31.8	20	2-12	60	73	63
S150N24-32	1.1/2	38.1	24	2-12	60	73	80

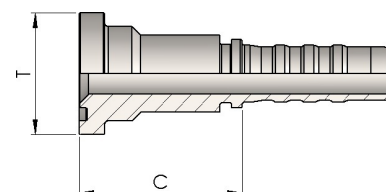
1250N**Straight SAE Flange 3000 PSI****(SFL)**

Product number	hose I.D.		Dimension			
	in	mm	dash size	T Flange	mm	Cut-off C
1250N08-08	1/2	12.7	08	1/2	30.2	48
1250N12-12	3/4	19	12	3/4	38.1	54
1250N12-16	3/4	19	12	1	44.5	55
1250N16-16	1	25.4	16	1	44.5	56
1250N16-20	1	25.4	16	1.1/4	50.8	59
1250N20-20	1.1/4	31.8	20	1.1/4	50.8	62
1250N20-24	1.1/4	31.8	20	1.1/2	60.3	65
1250N24-24	1.1/2	38.1	24	1.1/2	60.3	67
1250N24-32	1.1/2	38.1	24	2	71.4	72

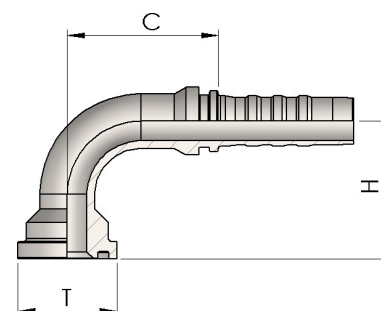1050N**90° SAE Flange 3000 PSI****(SFL 90°)**

Product number	hose I.D.		Dimension				
	in	mm	dash size	T Flange	mm	drop H	Cut-off C
1050N08-08	1/2	12.7	08	1/2	30.2	39	40
1050N12-12	3/4	19	12	3/4	38.1	53	58
1050N12-16	3/4	19	12	1	44.5	58	58
1050N16-16	1	25.4	16	1	44.5	65	72
1050N16-20	1	25.4	16	1.1/4	50.8	70	72
1050N20-20	1.1/4	31.8	20	1.1/4	50.8	82	97
1050N20-24	1.1/4	31.8	20	1.1/2	60.3	85	96
1050N24-24	1.1/2	38.1	24	1.1/2	60.3	96	115

1150N

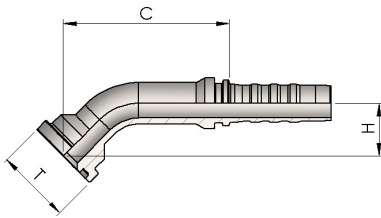


45° SAE Flange 3000 PSI

(SFL 45°)

Product number	hose I.D.		Dimension				
	in	mm	dash size	T Flange	mm	drop H	Cut-off C
1150N12-12	3/4	19	12	3/4	38.1	25	81
1150N12-16	3/4	19	12	1	44.5	28	86
1150N16-16	1	25.4	16	1	44.5	32	79
1150N16-20	1	25.4	16	1.1/4	50.8	37	113
1150N20-20	1.1/4	31.8	20	1.1/4	50.8	39	103
1150N20-24	1.1/4	31.8	20	1.1/2	60.3	39	107
1150N24-24	1.1/2	38.1	24	1.1/2	60.3	44	159


1300N

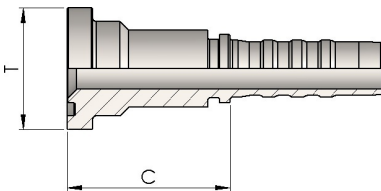

Straight SAE Flange 6000 PSI


(SFS)

Product number	hose I.D.		Dimension			
	in	mm	dash size	T Flange	mm	Cut-off C
1300N08-08	1/2	12.7	08	1/2	31.8	47
1300N12-12	3/4	19	12	3/4	41.3	56
1300N12-16	3/4	19	12	1	47.6	62
1300N16-16	1	25.4	16	1	47.6	63
1300N16-20	1	25.4	16	1.1/4	54	71
1300N20-20	1.1/4	31.8	20	1.1/4	54	73
1300N20-24	1.1/4	31.8	20	1.1/2	63.5	79
1300N24-24	1.1/2	38.1	24	1.1/2	63.5	81
1300N24-32	1.1/2	38.1	24	2	79.4	90

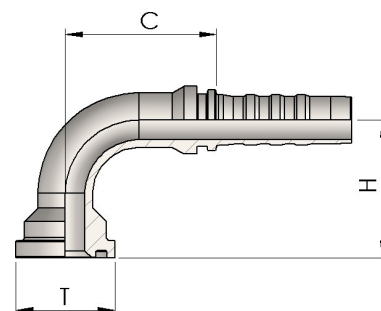1100N**90° SAE Flange 6000 PSI****(SFS 90°)**

Product number	hose I.D.		Dimension				
	in	mm	dash size	T Flange	mm	drop H	Cut-off C
1100N08-08	1/2	12.7	08	1/2	31.8	39	42
1100N10-12	5/8	15.9	10	3/4	41.3	51	46
1100N12-12	3/4	19	12	3/4	41.3	53	61
1100N12-16	3/4	19	12	1	47.6	63	56
1100N16-16	1	25.4	16	1	47.6	69	72
1100N16-20	1	25.4	16	1.1/4	54	77	72
1100N20-20	1.1/4	31.8	20	1.1/4	54	84.5	100
1100N20-24	1.1/4	31.8	20	1.1/2	63.5	92	99
1100N24-24	1.1/2	38.1	24	1.1/2	63.5	104	127

1200N

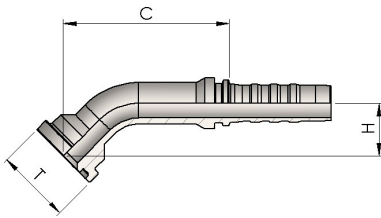


45° SAE Flange 6000 PSI

(SFS 45°)

Product number	hose I.D.		Dimension				
	in	mm	dash size	T Flange	mm	drop H	Cut-off C
1200N08-08	1/2	12.7	08	1/2	31.8	22	62
1200N12-12	3/4	19	12	3/4	41.3	27	90
1200N12-16	3/4	19	12	1	47.6	34	93
1200N16-16	1	25.4	16	1	47.6	34	90
1200N16-20	1	25.4	16	1.1/4	54	40	94
1200N20-16	1.1/4	31.8	20	1	47.6	34	98
1200N20-20	1.1/4	31.8	20	1.1/4	54	41	111
1200N20-24	1.1/4	31.8	20	1.1/2	63.5	46	120
1200N24-20	1.1/2	38.1	24	1.1/4	54	40	154
1200N24-24	1.1/2	38.1	24	1.1/2	63.5	50	122
1200N24-32	1.1/2	38.1	24	2	79.4	59	128


130SN

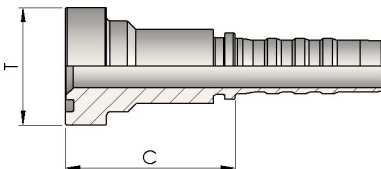

Straight 'CAT' Flange


(SFC)

Product number	hose I.D.		Dimension			
	in	mm	dash size	T Flange	mm	Cut-off C
130SN12-12	3/4	19	12	3/4	41.3	60
130SN12-16	3/4	19	12	1	47.6	66
130SN16-16	1	25.4	16	1	47.6	67
130SN16-20	1	25.4	16	1.1/4	54	75
130SN20-20	1.1/4	31.8	20	1.1/4	54	77
130SN24-24	1.1/2	38.1	24	1.1/2	63.5	85

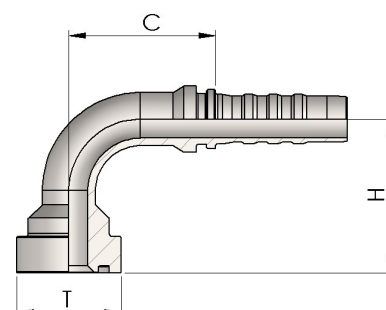110SN**90° 'CAT' Flange****(SFC 90°)**

Product number	hose I.D.		Dimension				
	in	mm	dash size	T Flange	mm	drop H	Cut-off C
110SN12-12	3/4	19	12	3/4	41.3	62	56
110SN12-16	3/4	19	12	1	47.6	65	56
110SN16-16	1	25.4	16	1	47.6	74	81
110SN16-20	1	25.4	16	1.1/4	54	80	78
110SN20-16	1.1/4	31.8	20	1	47.6	87	97
110SN20-20	1.1/4	31.8	20	1.1/4	54	90	97
110SN20-24	1.1/4	31.8	20	1.1/2	63.5	95	97
110SN24-20	1.1/2	38.1	24	1.1/4	54	101	115
110SN24-24	1.1/2	38.1	24	1.1/2	63.5	104	115
110SN24-32	1.1/2	38.1	24	2	79.4	104	115

120SN

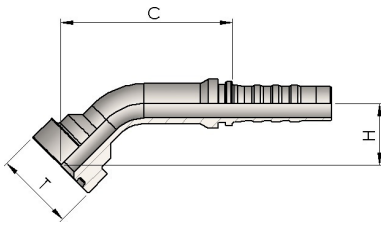

45° 'CAT' Flange

(SFC 45°)

Product number	hose I.D.		Dimension				
	in	mm	dash size	T Flange	mm	drop H	Cut-off C
120SN12-12	3/4	19	12	3/4	41.3	32	88
120SN12-16	3/4	19	12	1	47.6	37	93
120SN16-16	1	25.4	16	1	47.6	37	90
120SN16-20	1	25.4	16	1.1/4	54	44	122
120SN20-16	1.1/4	31.8	20	1	47.6	40	111
120SN20-20	1.1/4	31.8	20	1.1/4	54	43	114
120SN20-24	1.1/4	31.8	20	1.1/2	63.5	48	119
120SN24-20	1.1/2	38.1	24	1.1/4	54	50	170
120SN24-24	1.1/2	38.1	24	1.1/2	63.5	52	172