

Inter-lock Tail



	004N  Swaged Ferrule (skive) 94	0013  Swaged Ferrule (skive) 94		0370H  NPTF Male 60° cone 95
	0350H  BSP Male Parallel 60° cone 95	0050H  BSP Female 60° cone Thrust Wire 96	0150H  BSP 90° Swept Elbow 60° cone Thrust Wire 96	0250H  BSP 45° Swept Elbow 60° cone Thrust Wire 97
	0850H  JIC Male 74° cone 97		0900H  JIC Female 74° cone Thrust Wire 98	0950H  JIC 90° Swept Elbow 74° cone Thrust Wire 98
1000H  JIC 45° Swept Elbow 74° cone Thrust Wire 99		0450H  Metric Male 24° Seat Heavy 99	0084H  Metric Female 24° Seat Heavy 100	
0184H  90° Metric Swept Elbow 24° Seat Heavy 100	0284H  45° Metric Swept Elbow 24° Seat Heavy 101		S050H  ORFS Female 101	S05TH  ORFS Female Back Hexagon 102

S150H


ORFS 90° Swept
Elbow

102

S250H


ORFS 45° Swept
Elbow

103

S350H


ORFS Male

103


1250H


Straight SAE Flange
3000 PSI

104

1050H


90° SAE Flange 3000
PSI

104

1150H


45° SAE Flange 3000
PSI

105

1300H


Straight SAE Flange
6000 PSI

105

1100H


90° SAE Flange 6000
PSI

106

1200H


45° SAE Flange 6000
PSI

106


130SH


Straight 'CAT' Flange

107

110SH


90° 'CAT' Flange


107

120SH


45° 'CAT' Flange

108


004N

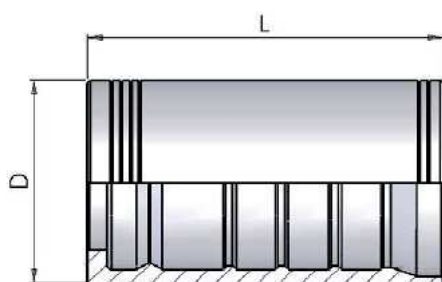

Boccola a Pressare (Skive)

Part number	Hose I.D.		Dimensions		Skive
	in	mm	D	L	Lenght
004N-12	3/4	19.0	38	60	52/15
004N-16	1	25.4	46	74.5	64/17
004N-20	1.1/4	31.8	55	88	74/22
004N-24	1.1/2	38.1	62	94	81/22,5
004N-32	2	50.8	78	99	85/30

0013

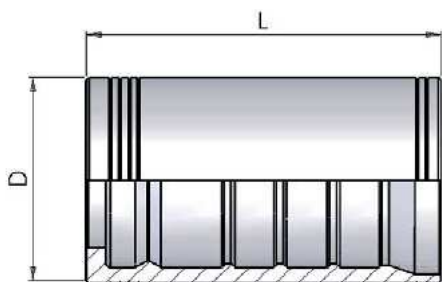


Boccola a Pressare (Skive)

Part number	Hose I.D.		Dimensions		Skive
	in	mm	D	L	Lenght
0013-10	5/8	15.9	35.5	57.5	47/15
0013-16	1	25.4	48	75	64/17
0013-20	1.1/4	31.8	60	88	74/22
0013-24	1.1/2	38.1	67	94	81/22,5
0013-32	2	50.8	84.5	99	85/30

0370H


Maschio NPTF svas. 60°

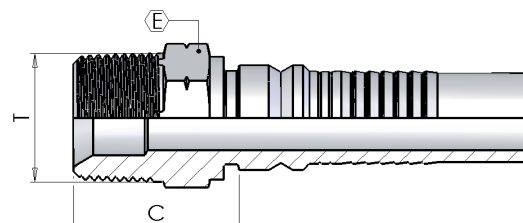

Part number	Hose I.D.		Dimensions			
	in	mm	Dash size	Thread T	Hex E	Cut-Off C
0370H12-12	3/4	19.0	12	3/4-14	27	35
0370H16-16	1	25.4	16	1-11.1/2	36	41
0370H20-20	1.1/4	31.8	20	1.1/4-11.1/2	46	44
0370H24-24	1.1/2	38.1	24	1.1/2-11.1/2	50	47
0370H32-32	2	50.8	32	2-11.1/2	65	54

0350H



Maschio BSP svas. 60°

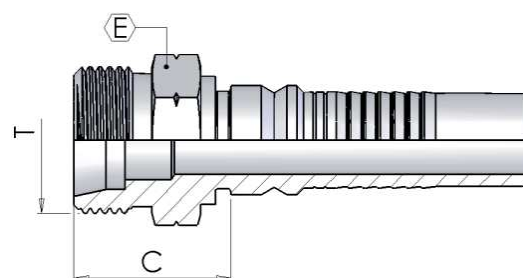

Part number	Hose I.D.		Dimensions			
	in	mm	Dash size	Thread T	Hex E	Cut-Off C
0350H12-12	3/4	19.0	12	3/4-14	32	33
0350H12-16	3/4	19.0	12	1-11	41	36
0350H16-16	1	25.4	16	1-11	41	37
0350H16-20	1	25.4	16	1.1/4-11	50	41
0350H20-20	1.1/4	31.8	20	1.1/4-11	50	42
0350H24-24	1.1/2	38.1	24	1.1/2-11	55	44
0350H32-32	2	50.8	32	2-11	70	53

0050H

Femmina BSP Cono 60° - Dado Spinato

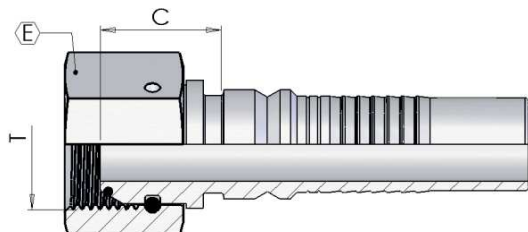


(*) - Femmina BSP con O-Ring

	Part number	Hose I.D.		Dimensions			
		in	mm	Dash size	Thread T	Hex E	Cut-Off C
(*)	0050H12-12	3/4	19.0	12	3/4-14	32	23
(*)	0050H12-16	3/4	19.0	12	1-11	38	25
(*)	0050H16-16	1	25.4	16	1-11	38	26
(*)	0050H20-20	1.1/4	31.8	20	1.1/4-11	50	29
(*)	0050H20-24	1.1/4	31.8	20	1.1/2-11	55	31
(*)	0050H24-24	1.1/2	38.1	24	1.1/2-11	55	31
(*)	0050H32-32	2	50.8	32	2-11	70	30

0150H

Curva BSP 90° Cono 60° - Dado Spinato

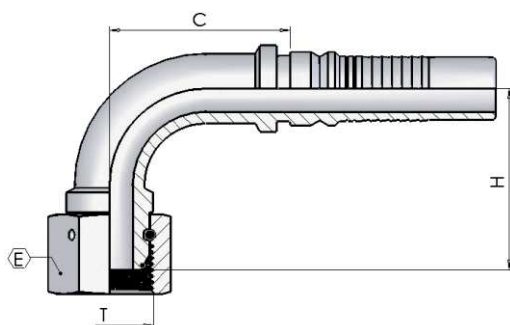


(*) - Femmina BSP con O-Ring

	Part number	Hose I.D.		Dimensions				
		in	mm	Dash size	Thread T	Hex E	Drop H	Cut-Off C
(*)	0150H12-12	3/4	19.0	12	3/4-14	32	57	54
(*)	0150H16-16	1	25.4	16	1-11	38	70	73
(*)	0150H16-20	1	25.4	16	1.1/4-11	50	76	73
(*)	0150H20-20	1.1/4	31.8	20	1.1/4-11	50	83	93
(*)	0150H24-24	1.1/2	38.1	24	1.1/2-11	55	104	111
(*)	0150H32-32	2	50.8	32	2-11	70	135	122

0250H

Curva BSP 45° Cono 60° - Dado
Spinato


(*) - Femmina BSP con O-Ring

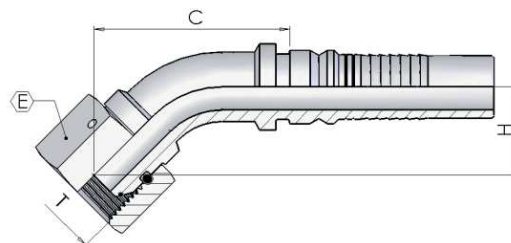

	Part number	Hose I.D.		Dimensions				
		in	mm	Dash	Thread	Hex	Drop	Cut-Off
				size	T	E	H	C
(*)	0250H12-12	3/4	19.0	12	3/4-14	32	28	84
(*)	0250H16-16	1	25.4	16	1-11	38	38	112
(*)	0250H20-20	1.1/4	31.8	20	1.1/4-11	50	41	137
(*)	0250H24-24	1.1/2	38.1	24	1.1/2-11	55	54	166
(*)	0250H32-32	2	50.8	32	2-11	70	70	195


0850H

Maschio JIC Cono 74°

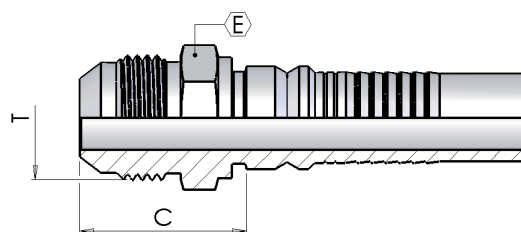

Part number	Hose I.D.		Dimensions			
	in	mm	Dash	Thread	Hex	Cut-Off
			size	T	E	C
0850H12-12	3/4	19.0	12	1.1/16-12	27	36
0850H16-16	1	25.4	16	1.5/16-12	34	40
0850H20-20	1.1/4	31.8	20	1.5/8-12	42	44
0850H24-24	1.1/2	38.1	24	1.7/8-12	50	49
0850H32-32	2	50.8	32	2.1/2-12	65	61


0900H

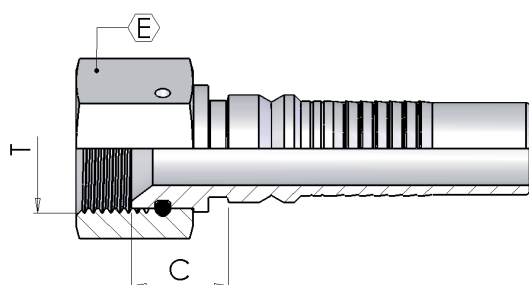

Femmina JIC svas. 74° - Dado Spinato

Part number	Hose I.D.		Dimensions			
	in	mm	Dash size	Thread T	Hex E	Cut-Off C
0900H12-12	3/4	19.0	12	1.1/16-12	32	19
0900H12-16	3/4	19.0	12	1.5/16-12	41	22
0900H16-16	1	25.4	16	1.5/16-12	41	23
0900H20-20	1.1/4	31.8	20	1.5/8-12	50	26
0900H24-24	1.1/2	38.1	24	1.7/8-12	55	29
0900H32-32	2	50.8	32	2.1/2-12	70	30

0950H

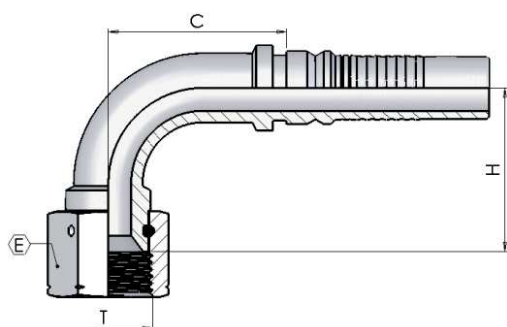


Curva JIC 90° svas. 74° - Dado Spinato

Part number	Hose I.D.		Dimensions				
	in	mm	Dash size	Thread T	Hex E	Drop H	Cut-Off C
0950H12-12	3/4	19.0	12	1.1/16-12	32	54	54
0950H12-16	3/4	19.0	12	1.5/16-12	41	62	54
0950H16-16	1	25.4	16	1.5/16-12	41	66	77
0950H20-20	1.1/4	31.8	20	1.5/8-12	50	86	92
0950H24-24	1.1/2	38.1	24	1.7/8-12	55	100	112
0950H32-32	2	50.8	32	2.1/2-12	70	134	121

1000H


Curva JIC 45° svas. 74° - Dado Spinato

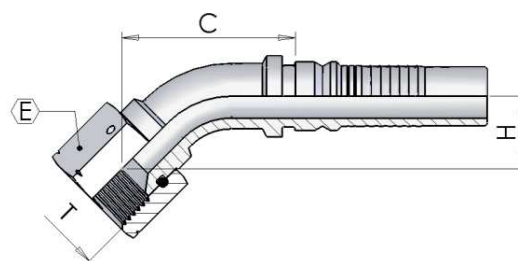

Part number	Hose I.D.		Dimensions				
	in	mm	Dash size	Thread T	Hex E	Drop H	Cut-Off C
1000H12-12	3/4	19.0	12	1.1/16-12	32	28	85
1000H12-16	3/4	19.0	12	1.5/16-12	41	32	88
1000H16-16	1	25.4	16	1.5/16-12	41	36	113
1000H20-20	1.1/4	31.8	20	1.5/8-12	50	50	133
1000H24-24	1.1/2	38.1	24	1.7/8-12	55	49	165
1000H32-32	2	50.8	32	2.1/2-12	70	67	194


0450H

Maschio Metrico svas. 24° - Serie Pesante

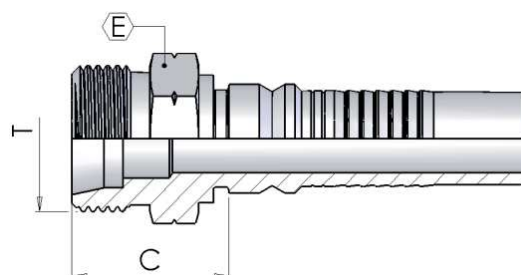

Part number	Hose I.D.		Dimensions				
	in	mm	Dash size	Thread T	Erm E	Hex E	Cut-Off C
0450H12-36	3/4	19.0	12	M36-2	25	36	36
0450H16-42	1	25.4	16	M42-2	30	46	39
0450H20-52	1.1/4	31.8	20	M52-2	38	55	42
0450H24-52	1.1/2	38.1	24	M52-2	38	55	42.5


0084H

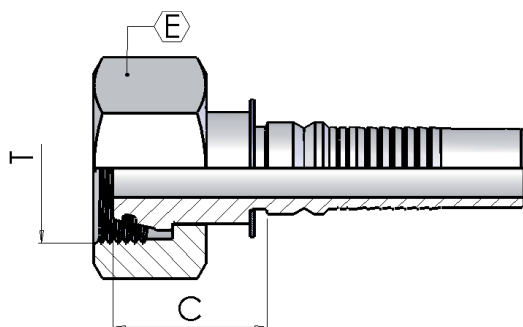

Femmina Metrica Cono 24° - Serie Pesante

Part number	Hose I.D.		Dimensions				
	in	mm	Dash size	Thread T	Erm	Hex E	Cut-Off C
0084H12-36	3/4	19.0	12	M36-2	25	46	37
0084H16-36	1	25.4	16	M36-2	25	46	38
0084H16-42	1	25.4	16	M42-2	30	50	41
0084H20-52	1.1/4	31.8	20	M52-2	38	60	41
0084H24-52	1.1/2	38.1	24	M52-2	38	60	42

0184H

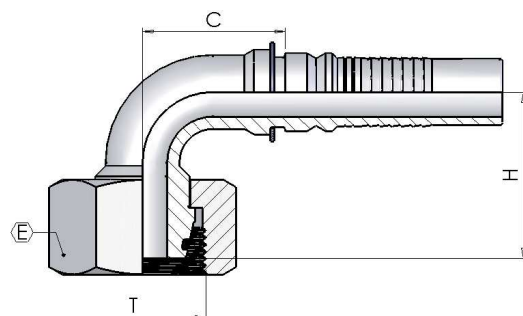


Curva Metrica 90° Cono 24° - Serie Pesante

Part number	Hose I.D.		Dimensions					
	in	mm	Dash size	Thread T	Erm	Hex E	Drop H	Cut-Off C
0184H12-36	3/4	19.0	12	M36-2	25	46	58	55
0184H16-36	1	25.4	16	M36-2	25	46	68	75
0184H16-42	1	25.4	16	M42-2	30	50	69	74
0184H20-52	1.1/4	31.8	20	M52-2	38	60	81	94

0284H


Curva Metrica 45° Cono 24° - Serie Pesante

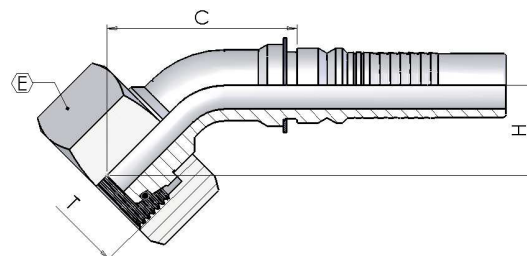

Part number	Hose I.D.		Dimensions					
	in	mm	Dash size	Thread T	Erm	Hex E	Drop H	Cut-Off C
0284H12-36	3/4	19.0	12	M36-2	25	46	31	94
0284H16-36	1	25.4	16	M36-2	25	46	34	110
0284H16-42	1	25.4	16	M42-2	30	50	33	112
0284H20-52	1.1/4	31.8	20	M52-2	38	60	81	93

S050H

Femmina ORFS

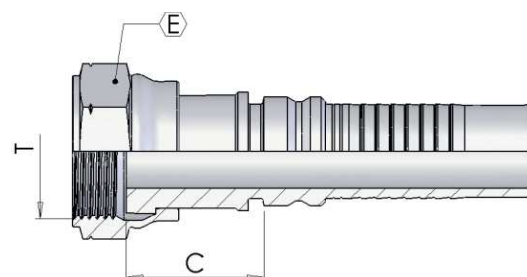


Dado Libero

Part number	Hose I.D.		Dimensions			
	in	mm	Dash size	Thread T	Hex E	Cut-Off C
S050H12-14	3/4	19.0	12	1.3/16-12	36	33
S050H16-15	1	25.4	16	1.7/16-12	41	37
S050H16-21	1	25.4	16	1.11/16-12	50	35.5
S050H20-21	1.1/4	31.8	20	1.11/16-12	50	37
S050H20-32	1.1/4	31.8	20	2-12	60	36.7
S050H24-32	1.1/2	38.1	24	2-12	60	41

S05TH


Femmina ORFS Doppio Esagono

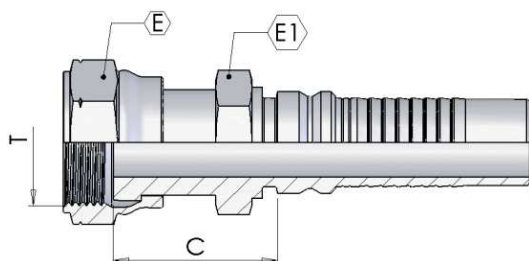

Part number	Hose I.D.		Dimensions				
	in	mm	Dash size	Thread T	Hex E	Hex E1	Cut-Off C
S05TH12-14	3/4	19.0	12	1.3/16-12	36	30	39
S05TH16-15	1	25.4	16	1.7/16-12	41	36	47
S05TH20-21	1.1/4	31.8	20	1.11/16-12	50	46	50

S150H


Curva ORFS 90°

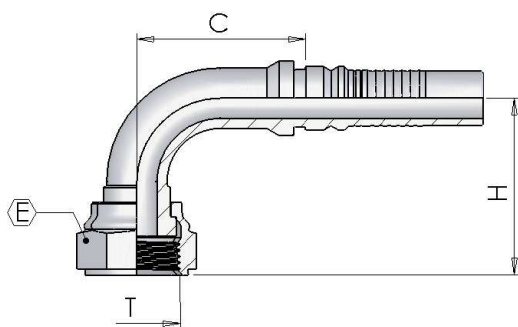

Part number	Hose I.D.		Dimensions				
	in	mm	Dash size	Thread T	Hex E	Drop H	Cut-Off C
S150H12-14	3/4	19.0	12	1.3/16-12	36	49	54
S150H16-15	1	25.4	16	1.7/16-12	41	66	69
Dado Libero S150H20-21	1.1/4	31.8	20	1.11/16-12	50	80	87
S150H24-32	1.1/2	38.1	24	2-12	60	102	111

S250H


Curva ORFS 45°

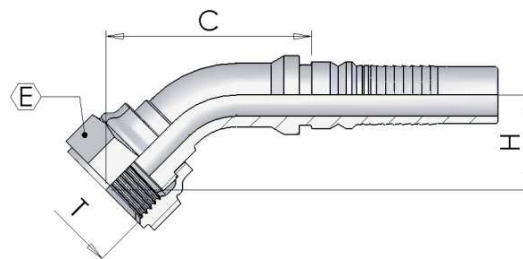

Part number	Hose I.D.		Dimensions				
	in	mm	Dash size	Thread T	Hex E	Drop H	Cut-Off C
S250H12-14	3/4	19.0	12	1.3/16-12	36	23	84
S250H16-15	1	25.4	16	1.7/16-12	41	33	107
Dado Libero S250H20-21	1.1/4	31.8	20	1.11/16-12	50	37	130
S250H24-32	1.1/2	38.1	24	2-12	60	50	165

S350H


Maschio ORFS

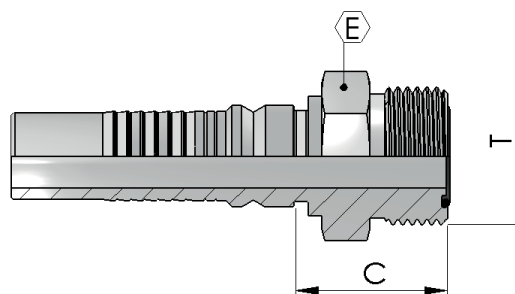

Part number	Hose I.D.		Dimensions			
	in	mm	Dash size	Thread T	Hex E	Cut-Off C
S350H12-14	3/4	19.0	12	1.3/16-12	32	34
S350H16-15	1	25.4	16	1.7/16-12	38	35
S350H20-21	1.1/4	31.8	20	1.11/16-12	46	36

1250H


Flangia Diritta SAE 3000 PSI

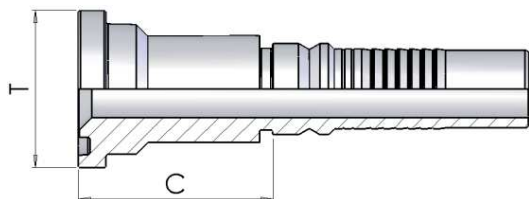

Part number	Hose I.D.		Dash size	Dimensions		Cut-Off C
	in	mm		Flange T	mm	
1250H12-12	3/4	19.0	12	3/4	38.1	47
1250H12-16	3/4	19.0	12	1	44.5	50
1250H16-16	1	25.4	16	1	44.5	52
1250H16-20	1	25.4	16	1.1/4	50.8	55
1250H20-20	1.1/4	31.8	20	1.1/4	50.8	56
1250H20-24	1.1/4	31.8	20	1.1/2	60.3	59
1250H24-24	1.1/2	38.1	24	1.1/2	60.3	60
1250H24-32	1.1/2	38.1	24	2	71.4	65
1250H32-32	2	50.8	32	2	71.4	67

1050H


Flangia 90° SAE 3000 PSI

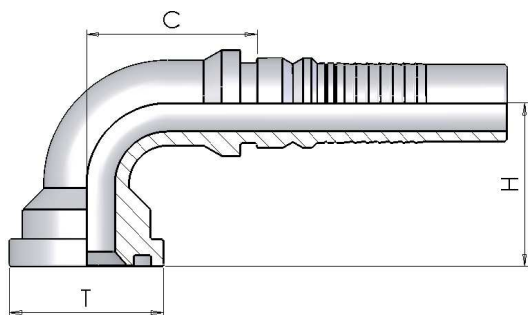

Part number	Hose I.D.		Dash size	Dimensions		Drop H	Cut-Off C
	in	mm		Flange T	mm		
1050H12-12	3/4	19.0	12	3/4	38.1	52	52
1050H12-16	3/4	19.0	12	1	44.5	56	55
1050H16-16	1	25.4	16	1	44.5	65	73
1050H16-20	1	25.4	16	1.1/4	50.8	71	69
1050H20-20	1.1/4	31.8	20	1.1/4	50.8	78	93
1050H20-24	1.1/4	31.8	20	1.1/2	60.3	80	97
1050H24-24	1.1/2	38.1	24	1.1/2	60.3	95	100
1050H24-32	1.1/2	38.1	24	2	71.4	101	134
1050H32-32	2	50.8	32	2	71.4	121	122

1150H


Flangia 45° SAE 3000 PSI

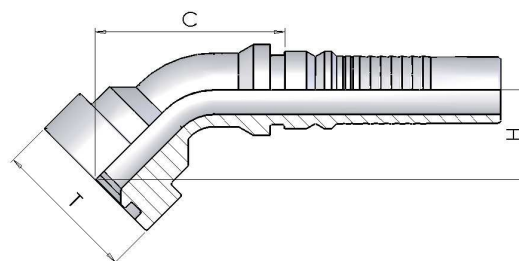

Part number	Hose I.D.		Dimensions				
	in	mm	Dash size	Flange T	mm	Drop H	Cut-Off C
1150H12-12	3/4	19.0	12	3/4	38.1	25	81
1150H12-16	3/4	19.0	12	1	44.5	28	86
1150H16-16	1	25.4	16	1	44.5	35	107
1150H16-20	1	25.4	16	1.1/4	50.8	37	113
1150H20-20	1.1/4	31.8	20	1.1/4	50.8	37	136
1150H20-24	1.1/4	31.8	20	1.1/2	60.3	40	136
1150H24-24	1.1/2	38.1	24	1.1/2	60.3	44	159
1150H24-32	1.1/2	38.1	24	2	71.4	47	159
1150H32-32	2	50.8	32	2	71.4	56	182


1300H

Flangia Diritta SAE 6000 PSI

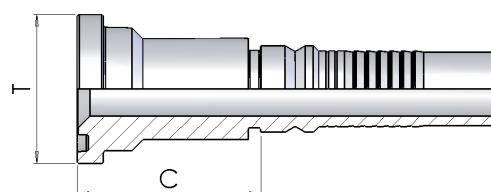

Part number	Hose I.D.		Dimensions			
	in	mm	Dash size	Flange T	mm	Cut-Off C
1300H12-12	3/4	19.0	12	3/4	41.3	51
1300H12-16	3/4	19.0	12	1	47.6	57
1300H16-12	1	25.4	16	3/4	41.3	52
1300H16-16	1	25.4	16	1	47.6	59
1300H16-20	1	25.4	16	1.1/4	54	66
1300H20-16	1.1/4	31.8	20	1	47.6	60
1300H20-20	1.1/4	31.8	20	1.1/4	54	67
1300H20-24	1.1/4	31.8	20	1.1/2	63.5	73
1300H24-20	1.1/2	38.1	24	1.1/4	54	75
1300H24-24	1.1/2	38.1	24	1.1/2	63.5	74
1300H24-32	1.1/2	38.1	24	2	79.4	82
1300H32-32	2	50.8	32	2	79.4	84


1100H

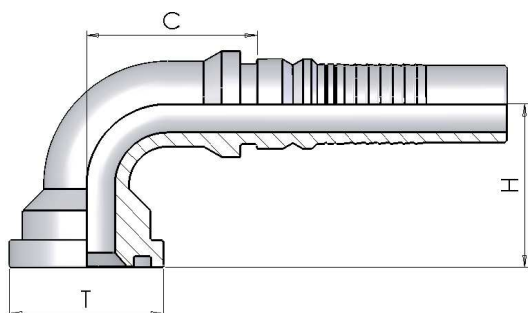

Flangia 90° SAE 6000 PSI

Part number	Hose I.D.		Dash size	Dimensions		Drop H	Cut-Off C
	in	mm		Flange T	mm		
1100H12-12	3/4	19.0	12	3/4	41.3	55	53
1100H12-16	3/4	19.0	12	1	47.6	63	52
1100H16-12	1	25.4	16	3/4	41.3	66	73
1100H16-16	1	25.4	16	1	47.6	72	74
1100H16-20	1	25.4	16	1.1/4	54	79.5	73
1100H20-16	1.1/4	31.8	20	1	47.6	80	93
1100H20-20	1.1/4	31.8	20	1.1/4	54	84,5	93
1100H20-24	1.1/4	31.8	20	1.1/2	63.5	90	98
1100H24-24	1.1/2	38.1	24	1.1/2	63.5	101	114
1100H24-32	1.1/2	38.1	24	2	79.4	115	115
1100H32-32	2	50.8	32	2	79.4	138	124

1200H

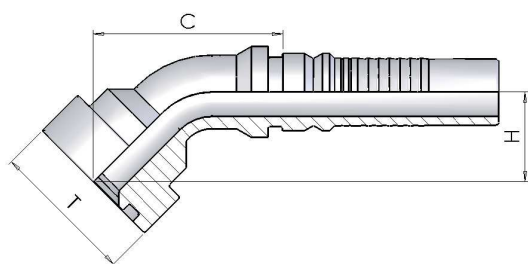


Flangia 45° SAE 6000 PSI

Part number	Hose I.D.		Dash size	Dimensions		Drop H	Cut-Off C
	in	mm		Flange T	mm		
1200H12-12	3/4	19.0	12	3/4	41.3	28	85
1200H12-16	3/4	19.0	12	1	47.6	34	88
1200H16-12	1	25.4	16	3/4	41.3	35	107
1200H16-16	1	25.4	16	1	47.6	34	112
1200H16-20	1	25.4	16	1.1/4	54	40	117
1200H20-16	1.1/4	31.8	20	1	47.6	42	117
1200H20-20	1.1/4	31.8	20	1.1/4	54	43	139
1200H20-24	1.1/4	31.8	20	1.1/2	63.5	48	144
1200H24-24	1.1/2	38.1	24	1.1/2	63.5	50	167
1200H24-32	1.1/2	38.1	24	2	79.4	64	166
1200H32-32	2	50.8	32	2	79.4	72	200

130SH


Flangia Diritta SUPERCAT

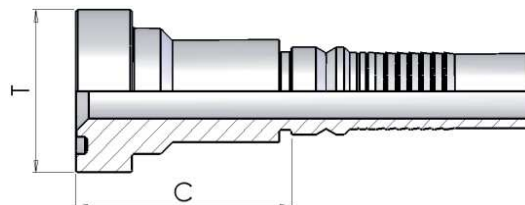

Part number	Hose I.D.		Dash size	Dimensions		Cut-Off
	in	mm		Flange		
				T	mm	C
130SH12-12	3/4	19.0	12	3/4	41.3	55
130SH12-16	3/4	19.0	12	1	47.6	62
130SH16-16	1	25.4	16	1	47.6	63
130SH16-20	1	25.4	16	1.1/4	54	70
130SH20-20	1.1/4	31.8	20	1.1/4	54	71
130SH24-24	1.1/2	38.1	24	1.1/2	64	78


110SH

Flangia 90° SUPERCAT

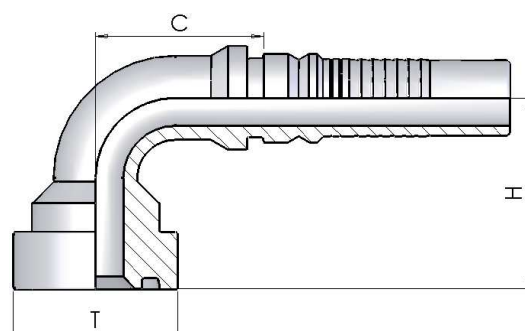

Part number	Hose I.D.		Dash size	Dimensions			
	in	mm		Flange	Drop	Cut-Off	
				T	mm	H	C
110SH12-12	3/4	19.0	12	3/4	41.3	62	51
110SH16-16	1	25.4	16	1	47.6	75	73.2
110SH16-20	1	25.4	16	1.1/4	54	82	74
110SH20-20	1.1/4	31.8	20	1.1/4	54	89	93
110SH24-24	1.1/2	38.1	24	1.1/2	63.5	100	115

120SH

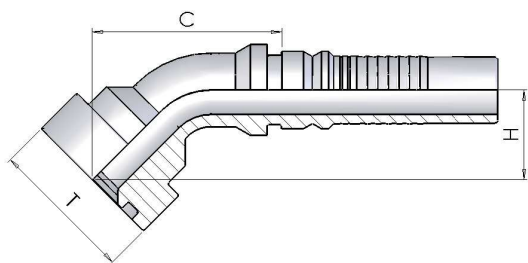

Flangia 45° SUPERCAT

Part number	Hose I.D.		Dimensions				
	in	mm	Dash size	Flange T	mm	Drop H	Cut-Off C
120SH12-12	3/4	19.0	12	3/4	41.3	30	89
120SH16-16	1	25.4	16	1	47.6	38	115
120SH20-20	1.1/4	31.8	20	1.1/4	54	47	142
120SH24-24	1,1/2	38.1	24	1.1/2	63.5	52	169