

Adattatori JIC 37°





5000



Dado (ISO 8434-2)

112



5010




Bussola per tubo metrico
(ISO 8434-2)

113



1900



Unione diritto maschio
JIC (ISO 8434-2)

114


5100



Unione a 90° maschio JIC
(ISO 8434-2)

115

5120



Unione a T maschio JIC
(ISO 8434-2)

115

5900




Unione a croce maschio
JIC (ISO 8434-2)

116




5056



Terminale dritto di
riduzione F/M JIC

117

5045



Unione diritto girevole JIC
(ISO 8434-2)

118

5060



Girevole a 90° F/M JIC
(ISO 8434-2)

118

5070



Girevole a 45° F/M JIC
(ISO 8434-2)

119


5080



Girevole a T laterale F/M
JIC (ISO 8434-2)

119

5090




Girevole a T centrale F/M
JIC (ISO 8434-2)

120



5110



Passaparete dritto JIC
(ISO 8434-2)

120

5130



Passaparete a 90° JIC
(ISO 8434-2)

121

J107




Controdado per
passaparete

121




1915



Terminale dritto M/M
JIC-BSPP (ISO 1179)

122


1905



Terminale dritto M/M
JIC-BSPP (ISO 8434-6)

123

5805



Terminale dritto M/M
JIC-BSPP (Form E ISO
1179-2)

124

5185



Terminale dritto M/F
fissa JIC-BSP

125

5230



Curva Orientabile 90° M/
M JIC-BSP (ISO 1179)

126

5235



Curva Orientabile 45° M/
M JIC-BSP (ISO 1179)

127


5240



Terminale a T orientabile
laterale M/M JIC-BSP
(ISO 1179)

128

5250



Terminale a T orientabile
centrale M/M JIC-BSP
(ISO 1179)

129


5035



Terminale dritto F/M JIC-
BSP (ISO 1179)

130

5036




Terminale dritto F/M JIC-
BSP (Form E ISO 1179-2)

131



1907



Terminale dritto M/M JIC-UNF (ISO 11926)

132

5190



Curva Orientabile 90° M/M JIC-UNF (ISO 11926)

133


5200



Curva Orientabile 45° M/M JIC-UNF (ISO 11926)

134


5210



Terminale a T orientabile laterale M/M JIC-UNF (ISO 11926)

134


5220



Terminale a T orientabile centrale M/M JIC-UNF (ISO 11926)


135

5050




Terminale dritto F/M JIC-UNF (ISO 11926)

135




1910



Terminale dritto M/M JIC-METRIC (ISO 6149)

136

5038



Terminale dritto F/M JIC-METRIC (ISO 6149)

137

5430



Curva Orientabile 90° M/M JIC-METRIC (ISO 6149)

138


5440



Curva Orientabile 45° M/M JIC-METRIC (ISO 6149)

139


5450



Terminale a T orientabile laterale M/M JIC-METRIC (ISO 6149)

140


5455



Terminale a T orientabile centrale M/M JIC-METRIC (ISO 6149)

141

1777



Terminale dritto M/M JIC-METRIC

142

5400



Curva Orientabile 90° M/M JIC-METRIC

143

5410



Curva Orientabile 45° M/M JIC-METRIC

144


5420



Terminale a T orientabile
laterale M/M JIC -
METRICO

145


5425



Terminale a T orientabile
centrale M/M JIC -
METRICO

146


1775



Terminale dritto M/M
JIC-METRICO (Form E ISO
9974-2)

147

5037




Terminale dritto F/M JIC-
METRICO (Form E ISO
9974-2)

148



1906



Terminale dritto M/M
JIC-NPTF

149

5140



Terminale a 90° M/M JIC-
NPTF

150


5150



Terminale a 45° M/M JIC-
NPTF

151


5160



Terminale a T laterale M/
M JIC-NPTF

152

5170



Terminale a T centrale
M/M JIC-NPTF

153

5180




Terminale dritto M/F
fissa JIC-NPTF

154



1903



Giunzione M/M Jic/Gas
Conico

155

5165



Terminale a 90° M/M JIC-
BSPT

156

5265



Terminale a 45° M/M JIC-
BSPT

157


5275



Terminale a T laterale M/
M JIC-BSPT

158

5280



Terminale a T centrale
M/M JIC-BSPT

158

J605



Tappo maschio JIC (ISO
8434-2)

159

J608



Tappo femmina JIC (ISO
8434-2)

160

5040



Tappo maschio SAE (ISO
11926-1)

160

MJ




Terminale dritto maschio
JIC a saldare con tasca
(ISO 8434-2)

161

Tappo

A saldare


5000



Dado (ISO 8434-2)


N

Product number	Ø tube		Dimension			Weight kg/unit
	mm	inch	F	L	CH1	
5000-04	6	1/4"	7/16" - 20	15.8	14	0,011
5000-05	8	5/16"	1/2" - 20	17.3	17	0,014
5000-06	10	3/8"	9/16" - 18	18.5	19	0,018
5000-08	12	1/2"	3/4" - 16	21.6	22	0,029
5000-10	16	5/8"	7/8" - 14	24.9	27	0,042
5000-12	20	3/4"	1.1/16" - 12	26.2	32	0,070
5000-16	25	1"	1.5/16" - 12	28.7	41	0,105
5000-20	32	1-1/4"	1.5/8" - 12	31.2	50	0,240
5000-24	38	1-1/2"	1.7/8" - 12	36.1	60	0,320

5010**Bussola per tubo metrico (ISO
8434-2)****MSL**

Product number	Ø tube	Dimension		Weight
	mm	L	D	kg/unit
5010-06	6	10.5	6	0,002
5010-08	8	11.5	8	0,002
5010-10	10	12.5	10	0,002
5010-12	12	14.5	12	0,007
5010-14	14	16.5	14	0,013
5010-16	16	16.5	16	0,015
5010-18	18	17	18	0,016
5010-20	20	17	20	0,012
5010-25	25	19.5	25	0,021
5010-30	30	23	30	0,045
5010-32	32	23	32	0,030
5010-38	38	28.5	38	0,050

1900

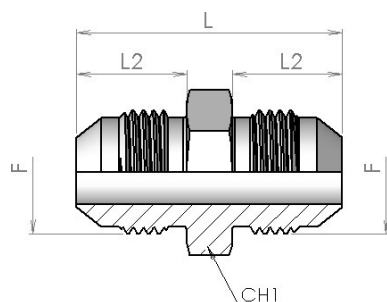

Unione diretto maschio JIC (ISO 8434-2)


S

Product number	Ø tube		Thread	Dimension			Weight
	mm	inch	F	L	L2	CH1	kg/unit
1900-04-04	6	1/4"	7/16-20	35	14	12	0,016
1900-05-05	8	5/16"	1/2-20	35	14	14	0,018
1900-06-06	10	3/8"	9/16-18	36	14	17	0,025
1900-08-08	12	1/2"	3/4-16	41	17	22	0,052
1900-10-10	16	5/8"	7/8-14	48	19	24	0,08
1900-12-12	20	3/4"	1 1/16-12	55	22	30	0,125
1900-16-16	25	1"	1 5/16-12	57	23	36	0,13
1900-20-20	30-32	1 1/4"	1 5/8-12	61.5	24	46	0,27
1900-24-24	38	1 1/2"	1 7/8-12	70	27.5	50	0,385
1900-32-32	50	2"	2 1/2-12	86.5	34	65	0,78

5100

Unione a 90° maschio JIC (ISO 8434-2)

E




Product number	Ø tube		Thread	Dimension			Weight
	mm	inch	F	L1	CH1	kg/unit	
5100-04	6	1/4"	7/16-20	22.5	12	0,025	
5100-05	8	5/16"	1/2-20	24	14	0,03	
5100-06	10	3/8"	9/16-18	27	14	0,045	
5100-08	12	1/2"	3/4-16	32	19	0,09	
5100-10	16	5/8"	7/8-14	37	22	0,14	
5100-12	20	3/4"	1 1/16-12	42	27	0,26	
5100-16	25	1"	1 5/16-12	46	33	0,33	
5100-20	32	1 1/4"	1 5/8-12	52.5	41	0,585	
5100-24	38	1 1/2"	1 7/8-12	59	50	0,8	

5120


Unione a T maschio JIC (ISO 8434-2)

T

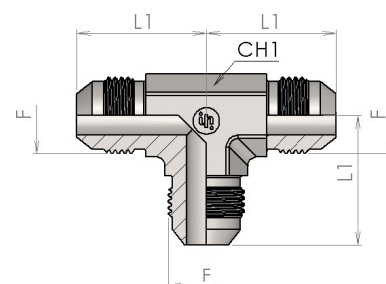

Product number	Ø tube		Thread	Dimension			Weight
	mm	inch	F	L	L1	CH1	kg/unit
5120-04	6	1/4"	7/16-20	52	22	12	0,035
5120-05	8	5/16"	1/2-20	48	24	14	0,045
5120-06	10	3/8"	9/16-18	52	27	14	0,055
5120-08	12	1/2"	3/4-16	64	32	19	0,12
5120-10	16	5/8"	7/8-14	64	36	22	0,18
5120-12	20	3/4"	1 1/16-12	84	42	27	0,29
5120-16	25	1"	1 5/16-12	92	46	33	0,415
5120-20	32	1 1/4"	1 5/8-12	104	52	41	0,7
5120-24	38	1 1/2"	1 7/8-12	118	59	50	1



5900



Unione a croce maschio JIC (ISO 8434-2)


K

Product number	Ø tube		Thread	Dimension		Weight
	mm	inch	F	L1	CH1	kg/unit
5900-04	6	1/4"	7/16-20	23	14	0,045
5900-05	8	5/16"	1/2-20	24	14	0,05
5900-06	10	3/8"	9/16-18	27	14	0,065
5900-08	12	1/2"	3/4-16	32	19	0,145
5900-10	16	5/8"	7/8-14	37	22	0,22
5900-12	20	3/4"	1 1/16-12	42	27	0,34

5056**Terminale dritto di riduzione F/M JIC****SRDS**

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L2	CH1	CH3	
5056-06-04	6	1/4"	7/16-20	9/16-18	24.5	14		19	0,032
5056-06-05	8	5/16"	1/2-20	9/16-18	26	14	19		0,03
5056-08-04	6	1/4"	7/16-20	3/4-16	27.5	14		22	0,038
5056-08-05	8	5/16"	1/2-20	3/4-16	27.5	14		22	0,035
5056-08-06	10	3/8"	9/16-18	3/4-16	27.5	14		22	0,032
5056-10-04	6	1/4"	7/16-20	7/8-14	27.5	14		27	0,083
5056-10-06	10	3/8"	9/16-18	7/8-14	27.5	14		27	0,078
5056-10-08	12	1/2"	3/4-16	7/8-14	41	16.7	27		0,081
5056-12-04	6	1/4"	7/16-20	1 1/16-12	31	14		32	0,12
5056-12-06	10	3/8"	9/16-18	1 1/16-12	31	14		32	0,115
5056-12-08	12	1/2"	3/4-16	1 1/16-12	33.5	16.7		32	0,128
5056-12-10	14-16	5/8"	7/8-14	1 1/16-12	42	19.3	32		0,120
5056-16-10	14-16	5/8"	7/8-14	1 5/16-12	35	19.3		41	0,240
5056-16-12	18-20	3/4"	1 1/16-12	1 5/16-12	35	22		41	0,250
5056-20-12	18-20	3/4"	1 1/16-12	1 5/8-12	41	22		50	0,370
5056-20-16	25	1"	1 5/16-12	1 5/8-12	42	23		50	0,355
5056-24-16	25	1"	1 5/16-12	1 7/8-12	42	23		60	0,610
5056-24-20	30-32	1 1/4"	1 5/8-12	1 7/8-12	43	24.5		60	0,615

5045

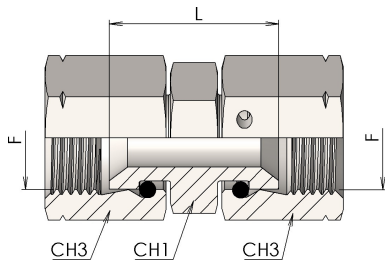


Unione diritto girevole JIC (ISO 8434-2)

SWS

Product number	Ø tube		Thread	Dimension			Weight
	mm	inch	F	L	CH1	CH3	kg/unit
5045-06	10	3/8"	9/16-18	26	19	19	0,04
5045-08	12	1/2"	3/4-16	29.5	22	22	0,07
5045-10	14-16	5/8"	7/8-14	31.5	27	27	0,12
5045-12	18-20	3/4"	1 1/16-12	33.5	32	32	0,19
5045-16	25	1"	1 5/16-12	38	41	41	0,245


5060




Girevole a 90° F/M JIC (ISO 8434-2)

SWE

Product number	Ø tube		Thread		Dimension				Weight
	mm	inch	F	F1	L	L1	CH1	CH3	kg/unit
5060-04	6	1/4"	7/16-20	7/16-20	16.7	22	12	14	0,037
5060-05	8	5/16"	1/2-20	1/2-20	17.4	24	14	17	0,043
5060-06	10	3/8"	9/16-18	9/16-18	22.3	27	14	19	0,054
5060-08	12	1/2"	3/4-16	3/4-16	24.4	32	19	22	0,105
5060-10	16	5/8"	7/8-14	7/8-14	28.4	36	22	27	0,162
5060-12	20	3/4"	1 1/16-12	1 1/16-12	30.1	42	27	32	0,26
5060-16	25	1"	1 5/16-12	1 5/16-12	35.7	46	33	41	0,42
5060-20	30-32	1 1/4"	1 5/8-12	1 5/8-12	42.8	52	41	50	0,679
5060-24	38	1 1/2"	1 7/8-12	1 7/8-12	47.2	59	50	60	0,747


5070**Girevole a 45° F/M JIC (ISO 8434-2)****SWE45**

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH3	
5070-04	6	1/4"	7/16-20	7/16-20	15	18.5	12	14	0,03
5070-05	8	5/16"	1/2-20	1/2-20	16	19.5	14	17	0,045
5070-06	10	3/8"	9/16-18	9/16-18	19	21	14	19	0,047
5070-08	12	1/2"	3/4-16	3/4-16	22	25	19	22	0,089
5070-10	16	5/8"	7/8-14	7/8-14	24	28	22	27	0,131
5070-12	20	3/4"	1.1/16-12	1.1/16-12	24	32.5	27	32	0,203
5070-16	25	1"	1.5/16-12	1.5/16-12	29.5	37.5	33	41	0,335
5070-20	30-32	1.1/4"	1.5/8-12	1.5/8-12	35.5	40.5	41	50	0,572
5070-24	38	1.1/2"	1.7/8-12	1.7/8-12	35.5	45.5	50	60	1,013

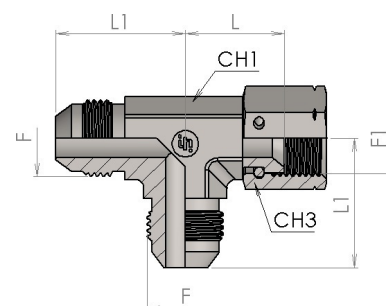5080**Girevole a T laterale F/M JIC (ISO 8434-2)****SWRT**

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH3	
5080-04	6	1/4"	7/16-20	7/16-20	16.7	22	12	14	0,044
5080-05	8	5/16"	1/2-20	1/2-20	17.4	24	14	17	0,058
5080-06	10	3/8"	9/16-18	9/16-18	22.3	27	14	19	0,071
5080-08	12	1/2"	3/4-16	3/4-16	24.4	32	19	22	0,133
5080-10	16	5/8"	7/8-14	7/8-14	28.4	36	22	27	0,203
5080-12	20	3/4"	1.1/16-12	1.1/16-12	30.1	42	27	32	0,328
5080-16	25	1"	1.5/16-12	1.5/16-12	35.7	46	33	41	0,483
5080-20	30-32	1.1/4"	1.5/8-12	1.5/8-12	42.8	52	41	50	0,7018
5080-24	38	1.1/2"	1.7/8-12	1.7/8-12	47.2	59	50	60	1,1

5090

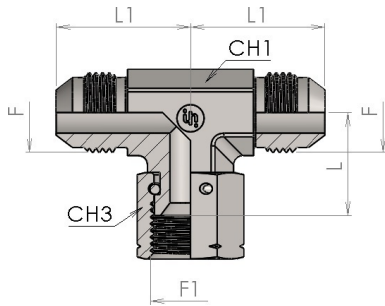


Girevole a T centrale F/M JIC (ISO 8434-2)

SWBT

Product number	W.P.	Ø tube		Thread		Dimension									Weight
	bar	mm	inch	F	F1	F	T	C	H	E	L	L1	CH1	CH3	kg/unit
5090-04	350	6	1/4"	7/16-20	7/16-20	7/16" - 20	7/16" - 20	23	16	11	16.7	22	12	14	0,044
5090-05	350	8	5/16"	1/2-20	1/2-20	1/2" - 20	1/2" - 20	24	17	14	17.4	24	14	17	0,058
5090-06	350	10	3/8"	9/16-18	9/16-18	9/16" - 18	9/16" - 18	26	19	14	22.3	27	14	19	0,071
5090-08	310	12	1/2"	3/4-16	3/4-16	3/4" - 16	3/4" - 16	32	24	19	24.4	32	19	22	0,133
5090-10	240	16	5/8"	7/8-14	7/8-14	7/8" - 14	7/8" - 14	37	27	22	28.4	36	22	27	0,203
5090-12	240	20	3/4"	1.1/16-12	1.1/16-12	1.1/16" - 12	1.1/16" - 12	42	32	27	30.1	42	27	32	0,328
5090-16	210	25	1"	1.5/16-12	1.5/16-12	1.5/16" - 12	1.5/16" - 12	46	38	33	35.7	46	33	41	0,483
5090-20	170	30-32	1.1/4"	1.5/8-12	1.5/8-12	1.5/8" - 12	1.5/8" - 12	52	50	41	42.8	52	41	50	0,7018
5090-24	140	38	1.1/2"	1.7/8-12	1.7/8-12						47.2	59	50	60	1,1

5110

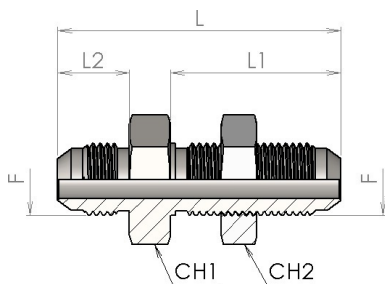

Passaparete dritto JIC (ISO 8434-2)


BHS

Product number	Ø tube		Thread	Dimension					Weight
	mm	inch	F	L	L1	L2	CH1	CH2	kg/unit
5110-04	6	1/4"	7/16-20	52.5	30.5	14	17	17	0,04
5110-05	8	5/16"	1/2-20	52.5	30.5	14	19	19	0,048
5110-06	10	3/8"	9/16-18	55.5	32.5	14	22	22	0,065
5110-08	12	1/2"	3/4-16	62	36.5	17	24	24	0,11
5110-10	16	5/8"	7/8-14	69.5	40	19	30	30	0,155
5110-12	20	3/4"	1.1/16-12	78.5	44.5	22	36	36	0,255
5110-16	25	1"	1.5/16-12	80	44.5	23	41	41	0,335
5110-20	32	1.1/4"	1.5/8-12	84	45.5	14	50	50	0,465
5110-24	38	1.1/2"	1.7/8-12	89.5	46	27.5	55	55	0,7

5130

Passaparete a 90° JIC (ISO 8434-2)


BHE



Product number	Ø tube		Thread	Dimension				Weight
	mm	inch	F	L	L1	CH1	CH2	kg/unit
5130-04	6	1/4"	7/16-20	40.5	24.5	14	17	0,05
5130-05	8	5/16"	1/2-20	43.5	27	14	19	0,065
5130-06	10	3/8"	9/16-18	46	27.5	14	22	0,072
5130-08	12	1/2"	3/4-16	53.5	34	19	24	0,15
5130-10	16	5/8"	7/8-14	60	39	22	30	0,21
5130-12	20	3/4"	1 1/16-12	68	45	27	36	0,34
5130-16	25	1"	1 5/16-12	71	49.5	33	41	0,45


J107

Controdado per passaparete



Product number	Thread	Dimension		Weight
	F	L	CH2	kg/unit
J107-04	7/16-20	7	17	0,008
J107-05	1/2-20	7.5	19	0,007
J107-06	9/16-18	7	22	0,011
J107-08	3/4-16	9	24	0,015
J107-10	7/8-14	10	30	0,031
J107-12	1 1/16-12	12	36	0,054
J107-16	1 5/16-12	12	41	0,057
J107-20	1 5/8-12	13	50	0,087
J107-24	1 7/8-12	13	55	0,088

1915

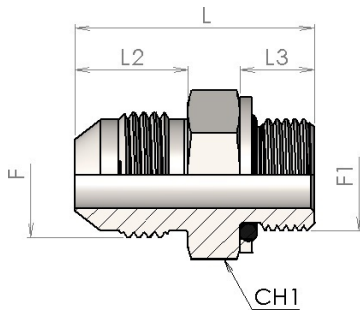


Terminale dritto M/M JIC-BSPP (ISO 1179)

SDS

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L2	L3	CH1	
1915-02-04	6	1/4"	7/16-20	G 1/8	30	14	8	14	0,015
1915-02-05	8	5/16"	1/2-20	G 1/8	29	14	8	14	0,02
1915-04-04	6	1/4"	7/16-20	G 1/4	34.5	14	12	19	0,034
1915-04-05	8	5/16"	1/2-20	G 1/4	34	14	12	19	0,03
1915-04-06	10	3/8"	9/16-18	G 1/4	34	14	12	19	0,028
1915-04-08	12	1/2"	3/4-16	G 1/4	37.5	17	12	22	0,045
1915-06-04	6	1/4"	7/16-20	G 3/8	34.5	14	12	22	0,047
1915-06-05	8	5/16"	1/2-20	G 3/8	34.5	14	12	22	0,047
1915-06-06	10	3/8"	9/16-18	G 3/8	34.5	14	12	22	0,04
1915-06-08	12	1/2"	3/4-16	G 3/8	38	17	12	22	0,05
1915-06-10	14-16	5/8"	7/8-14	G 3/8	40	19	12	24	0,065
1915-08-06	10	3/8"	9/16-18	G 1/2	40	14	14	27	0,02
1915-08-08	12	1/2"	3/4-16	G 1/2	41	17	14	27	0,095
1915-08-10	16	5/8"	7/8-14	G 1/2	44	19	14	27	0,095
1915-08-12	18-20	3/4"	1 1/16-12	G 1/2	47	22	14	30	0,115
1915-12-08	12	1/2"	3/4-16	G 3/4	45	17	16	36	0,1
1915-12-10	14-16	5/8"	7/8-14	G 3/4	47	19	16	36	0,16
1915-12-12	20	3/4"	1 1/16-12	G 3/4	50	22	16	36	0,17
1915-12-16	25	1"	1 5/16-12	G 3/4	51	23	16	36	0,175
1915-16-12	18-20	3/4"	1 1/16-12	G 1	52.5	22	18	41	0,21
1915-16-16	25	1"	1 5/16-12	G 1	53.5	23	18	41	0,22
1915-16-20	30-32	1.1/4"	1 5/8-12	G 1	55.5	24	18	46	0,33
1915-20-16	25	1"	1 5/16-12	G 1.1/4	57	23	20	50	0,385
1915-20-20	30-32	1.1/4"	1 5/8-12	G 1.1/4	58	24	20	50	0,33
1915-20-24	38	1.1/2"	1 7/8-12	G 1.1/2	61	27.5	18	50	0,417
1915-24-24	38	1.1/2"	1 7/8-12	G 1.1/2	65.5	27.5	22	55	0,48


1905

Terminale dritto M/M JIC-BSPP (ISO 8434-6)

SDS

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L2	L3	CH1	
1905-02-04	6	1/4"	7/16-20	G 1/8-28	28.5	14	8	14	0,014
1905-04-04	6	1/4"	7/16-20	G 1/4	33	14	11	19	0,03
1905-04-05	8	5/16"	1/2-20	G 1/4	33	14	11	19	0,03
1905-04-06	10	3/8"	9/16-18	G 1/4	33	14	11	19	0,03
1905-04-08	12	1/2"	3/4-16	G 1/4	38	17	12	22	0,062
1905-06-04	6	1/4"	7/16-20	G 3/8	35.5	14	12	22	0,047
1905-06-05	8	5/16"	1/2-20	G 3/8	35.5	14	12	22	0,047
1905-06-06	10	3/8"	9/16-18	G 3/8	35.5	14	12	22	0,047
1905-06-08	12	1/2"	3/4-16	G 3/8	38	17	12	22	0,062
1905-06-10	16	5/8"	7/8-14	G 3/8	42	19	12	24	0,068
1905-08-06	10	3/8"	9/16-18	G 1/2	39	14	14	27	0,068
1905-08-08	12	1/2"	3/4-16	G 1/2	41.5	17	14	27	0,079
1905-08-10	16	5/8"	7/8-14	G 1/2	44.5	19	14	27	0,085
1905-08-12	20	3/4"	1 1/16-12	G 1/2	47	22	14	27	0,12
1905-12-08	12	1/2"	3/4-16	G 3/4	43.5	17	16	32	0,145
1905-12-10	16	5/8"	7/8-14	G 3/4	46.5	19	16	32	0,155
1905-12-12	20	3/4"	1 1/16-12	G 3/4	49	22	16	32	0,162
1905-12-16	25	1"	1 5/16-12	G 3/4	52	23	16	36	0,175
1905-16-12	20	3/4"	1 1/16-12	G 1	52	22	19	41	0,21
1905-16-16	25	1"	1 5/16-12	G 1	54	23	19	41	0,215
1905-16-20	30	1.1/4"	1 5/8-12	G 1	57	24	19	42	0,29
1905-20-20	30	1.1/4"	1 5/8-12	G 1.1/4	58	24	20	50	0,435
1905-24-24	38	1.1/2"	1 7/8-12	G 1.1/2	62.5	27.5	22	55	0,61


5805

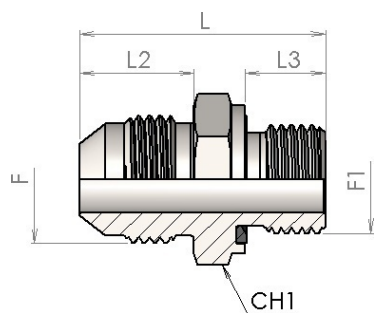

Terminale dritto M/M JIC-BSPP (Form E ISO 1179-2)


SDS

Product number	Ø tube		Dimension				Thread		Weight
	mm	inch	L	F	F1	L2	L3	CH1	kg/unit
5805-02-04	6	1/4"	30	7/16-20	G 1/8	14	8	14	0,02
5805-04-04	6	1/4"	36.5	7/16-20	G 1/4	14	12	19	0,034
5805-04-05	8	5/16"	35	1/2-20	G 1/4	14	12	19	0,03
5805-04-06	10	3/8"	35	9/16-18	G 1/4	14	12	19	0,028
5805-06-06	10	3/8"	36.5	9/16-18	G 3/8	14	12	22	0,04
5805-06-08	12	1/2"	38.5	3/4-16	G 3/8	17	12	22	0,05
5805-08-06	10	3/8"	39	9/16-18	G 1/2	14	14	27	0,095
5805-08-08	12	1/2"	43	3/4-16	G 1/2	17	14	27	0,1
5805-08-10	16	5/8"	44.5	7/8-14	G 1/2	19	14	27	0,103
5805-08-12	18-20	3/4"	49	1 1/16-12	G 1/2	22	14	30	0,118
5805-12-08	12	1/2"	47	3/4-16	G 3/4	17	16	32	0,1
5805-12-10	14-16	5/8"	49.5	7/8-14	G 3/4	19	16	32	0,16
5805-12-12	20	3/4"	51	1 1/16-12	G 3/4	22	16	32	0,165
5805-16-16	25	1"	55	1 5/16-12	G 1	23	18	41	0,262
5805-20-20	30-32	1.1/4"	60	1 5/8-12	G 1.1/4	24	20	50	0,375
5805-24-24	38	1.1/2"	67	1 7/8-12	G 1.1/2	27.5	22	55	0,48

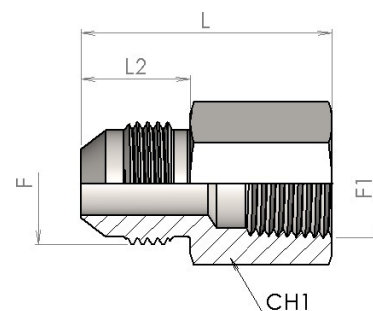5185**Terminale dritto M/F fissa JIC-BSP****SWS**

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L2	CH1	
5185-02-04	6	1/4"	7/16-20	G 1/8	30	14	14	0,045
5185-02-05	8	5/16"	1/2-20	G 1/8	30	14	14	0,04
5185-04-04	6	1/4"	7/16-20	G 1/4	35.5	14	19	0,045
5185-04-05	8	5/16"	1/2-20	G 1/4	35.5	14	19	0,045
5185-04-06	10	3/8"	9/16-18	G 1/4	35.5	14	19	0,04
5185-04-08	12	1/2"	3/4-16	G 1/4	38.5	17	22	0,04
5185-06-06	10	3/8"	9/16-18	G 3/8	36.5	14	22	0,065
5185-06-08	12	1/2"	3/4-16	G 3/8	39.5	17	22	0,045
5185-08-06	10	3/8"	9/16-18	G 1/2	43	14	30	0,105
5185-08-08	12	1/2"	3/4-16	G 1/2	45.5	17	30	0,1
5185-08-10	14-16	5/8"	7/8-14	G 1/2	48	19.5	30	0,125
5185-08-12	18-20	3/4"	1.1/16-12	G 1/2	52	22	30	0,125
5185-12-12	18-20	3/4"	1.1/16-12	G 3/4	52.5	22	36	0,19
5185-16-16	25	1"	1.5/16-12	G 1	59.5	23	41	0,28
5185-20-20	30-32	1.1/4"	1.5/8-12	G 1.1/4	63	24.5	50	0,41
5185-24-24	38	1.1/2"	1.7/8-12	G 1.1/2	66.5	27.5	60	0,37

5230




Curva Orientabile 90° M/M JIC-BSP (ISO 1179)

SDE

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5230-02-04	6	1/4"	7/16-20	G 1/8	27	22	12	14	0,037
5230-02-05	8	5/16"	1/2-20	G 1/8	29	24	14	14	0,047
5230-04-04	6	1/4"	7/16-20	G 1/4	33	23	14	19	0,043
5230-04-05	8	5/16"	1/2-20	G 1/4	33	24	14	19	0,055
5230-04-06	10	3/8"	9/16-18	G 1/4	33	27	14	19	0,061
5230-04-08	12	1/2"	3/4-16	G 1/4	35	32	19	19	0,088
5230-06-06	10	3/8"	9/16-18	G 3/8	37	29.5	19	22	0,087
5230-06-08	12	1/2"	3/4-16	G 3/8	37	32	19	22	0,092
5230-06-10	14-16	5/8"	7/8-14	G 3/8	40	36	22	22	0,19
5230-08-04	6	1/4"	7/16-20	G 1/2	43	29	22	27	0,127
5230-08-06	10	3/8"	9/16-18	G 1/2	43	31.5	22	27	0,14
5230-08-08	12	1/2"	3/4-16	G 1/2	43	34	22	27	0,155
5230-08-10	14-16	5/8"	7/8-14	G 1/2	43	36	22	27	0,164
5230-08-12	18-20	3/4"	1.1/16-12	G 1/2	46.5	42	27	27	0,245
5230-12-08	12	1/2"	3/4-16	G 3/4	50	38	27	36	0,205
5230-12-10	14-16	5/8"	7/8-14	G 3/4	50	39	27	36	0,217
5230-12-12	18-20	3/4"	1.1/16-12	G 3/4	50	42	27	36	0,295
5230-12-16	25	1"	1.5/16-12	G 3/4	52	46	33	36	0,405
5230-16-12	18-20	3/4"	1.1/16-12	G 1	53	44	33	41	0,317
5230-16-16	25	1"	1.5/16-12	G 1	53	46	33	41	0,425
5230-16-20	30-32	1.1/4"	1.5/8-12	G 1	57	52	41	41	0,65
5230-20-16	25	1"	1.5/16-12	G 1.1/4-11	58	49	41	50	0,672
5230-20-20	30-32	1.1/4"	1.5/8-12	G 1.1/4-11	58	52	41	50	0,697
5230-20-24	38	1.1/2"	1.7/8-12	G 1.1/4-11	63	59	50	50	0,964
5230-24-24	38	1.1/2"	1.7/8-12	G 1.1/2-11	63	59	50	55	0,953


5235

Curva Orientabile 45° M/M JIC-BSP (ISO 1179)

SDE45

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5235-02-04	6	1/4"	7/16-20	G 1/8	27	21	12	14	0,035
5235-04-04	6	1/4"	7/16-20	G 1/4	30	21.5	14	19	0,048
5235-04-05	8	5/16"	1/2-20	G 1/4	30	21.5	14	19	0,051
5235-04-06	10	3/8"	9/16-18	G 1/4	30	21.5	14	19	0,055
5235-06-06	10	3/8"	9/16-18	G 3/8	33.5	22	19	22	0,07
5235-06-08	12	1/2"	3/4-16	G 3/8	33.5	26	19	22	0,104
5235-08-06	10	3/8"	9/16-18	G 1/2	39	25.5	22	27	0,092
5235-08-08	12	1/2"	3/4-16	G 1/2	39	27.5	22	27	0,148
5235-08-10	14-16	5/8"	7/8-14	G 1/2	39	29	22	27	0,165
5235-08-12	18-20	3/4"	1.1/16-12	G 1/2	41.5	33	27	27	0,182
5235-12-08	12	1/2"	3/4-16	G 3/4	44	29.5	27	36	0,218
5235-12-10	14-16	5/8"	7/8-14	G 3/4	44	31	27	36	0,235
5235-12-12	18-20	3/4"	1.1/16-12	G 3/4	44	33	27	36	0,27
5235-16-16	25	1"	1.5/16-12	G 1	47	37.5	33	41	0,394
5235-20-20	30-32	1.1/4"	1.5/8-12	G 1.1/4	48.5	40.5	41	50	0,599
5235-24-24	38	1.1/2"	1.7/8-12	G 1.1/2	55	45.5	50	55	0,854

5240

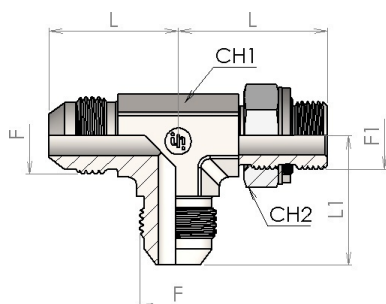


Terminale a T orientabile laterale M/M JIC-BSP (ISO 1179)

SDRT

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5240-02-04	6	1/4"	7/16-20	G 1/8	27	22	12	14	0,047
5240-04-05	8	5/16"	1/2-20	G 1/4	33	24	14	19	0,072
5240-04-06	10	3/8"	9/16-18	G 1/4	33	27	14	19	0,078
5240-06-06	10	3/8"	9/16-18	G 3/8	37	29.5	19	22	0,148
5240-06-08	12	1/2"	3/4-16	G 3/8	37	32	19	22	0,154
5240-08-08	12	1/2"	3/4-16	G 1/2	43	34	22	27	0,223
5240-08-10	14-16	5/8"	7/8-14	G 1/2	43	36	22	27	0,231
5240-12-12	18-20	3/4"	1.1/16-12	G 3/4	50	42	27	36	0,379
5240-16-16	25	1"	1.5/16-12	G 1	53	46	33	41	0,569
5240-20-20	30-32	1.1/4"	1.5/8-12	G 1.1/4-11	58	52	41	50	1,075
5240-24-24	38	1.1/2"	1.7/8-12	G 1.1/2-11	63	59	50	55	1,3


5250

Terminale a T orientabile centrale M/M JIC-BSP (ISO 1179)

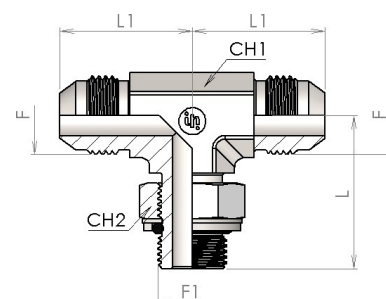SDBT

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5250-02-04	6	1/4"	7/16-20	G 1/8	27	22	12	14	0,047
5250-04-05	8	5/16"	1/2-20	G 1/4	33	24	14	19	0,072
5250-04-06	10	3/8"	9/16-18	G 1/4	33	27	14	19	0,078
5250-06-06	10	3/8"	9/16-18	G 3/8	37	29.5	19	22	0,148
5250-06-08	12	1/2"	3/4-16	G 3/8	37	32	19	22	0,154
5250-08-08	12	1/2"	3/4-16	G 1/2	43	34	22	27	0,223
5250-08-10	14-16	5/8"	7/8-14	G 1/2	43	36	22	27	0,231
5250-12-12	18-20	3/4"	1.1/16-12	G 3/4	50	42	27	36	0,379
5250-16-16	25	1"	1.5/16-12	G 1	53	46	33	41	0,569
5250-20-20	30-32	1.1/4"	1.5/8-12	G 1.1/4-11	58	52	41	50	1,075
5250-24-24	38	1.1/2"	1.7/8-12	G 1.1/2-11	63	59	50	55	1,3

5035



Terminale dritto F/M JIC-BSP (ISO 1179)


SWS

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L3	CH1	CH3	
5035-04-02	6	1/4"	7/16-20	G 1/8	25	8	14	14	0,03
5035-04-04	6	1/4"	7/16-20	G 1/4	30.5	12	19	14	0,039
5035-04-06	6	1/4"	7/16-20	G 3/8	31.5	12	22	14	0,057
5035-05-04	8	5/16"	1/2-20	G 1/4	31.5	12	19	17	0,042
5035-05-06	8	5/16"	1/2-20	G 3/8	31.5	12	22	17	0,057
5035-06-04	10	3/8"	9/16-18	G 1/4	32.5	12	19	19	0,046
5035-06-06	10	3/8"	9/16-18	G 3/8	32.5	12	22	19	0,061
5035-06-08	10	3/8"	9/16-18	G 1/2	34.5	14	27	19	0,089
5035-08-04	12	1/2"	3/4-16	G 1/4	33	12	19	22	0,055
5035-08-06	12	1/2"	3/4-16	G 3/8	33	12	22	22	0,062
5035-08-08	12	1/2"	3/4-16	G 1/2	36.5	14	27	22	0,098
5035-10-06	16	5/8"	7/8-14	G 3/8	30	12	22	27	0,084
5035-10-08	16	5/8"	7/8-14	G 1/2	37	14	27	27	0,127
5035-10-12	16	5/8"	7/8-14	G 3/4	41	16	36	27	0,25
5035-12-08	20	3/4"	1 1/16-12	G 1/2	37	14	27	32	0,15
5035-12-12	20	3/4"	1 1/16-12	G 3/4	41	16	36	32	0,27
5035-12-16	20	3/4"	1 1/16-12	G 1	43.5	18.5	41	41	0,36
5035-16-12	25	1"	1 5/16-12	G 3/4	42.5	16	36	41	0,32
5035-16-16	25	1"	1 5/16-12	G 1	45	18.5	41	41	0,4
5035-20-20	30	1 1/4"	1 5/8-12	G 1 1/4	48	18.5	50	50	0,58
5035-24-24	38	1 1/2"	1 7/8-12	G 1 1/2	51.5	18.5	55	60	0,79

5036


Terminale dritto F/M JIC-BSP (Form E ISO 1179-2)

SWS

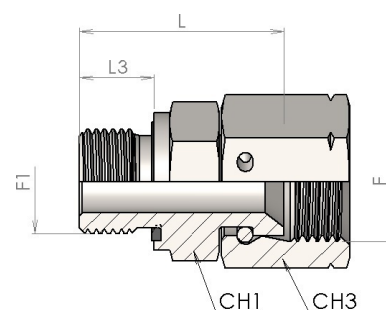

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L3	CH1	CH3	
5036-04-04	6	1/4"	7/16-20	G 1/4	30.5	12	19	14	0,04
5036-04-05	8	5/16"	1/2-20	G 1/4	31.5	12	19	17	0,042
5036-04-06	10	3/8"	9/16-18	G 1/4	32.5	12	19	19	0,045
5036-06-06	10	3/8"	9/16-18	G 3/8	34.5	12	22	19	0,06
5036-06-08	12	1/2"	3/4-16	G 3/8	33	12	22	22	0,065
5036-08-08	12	1/2"	3/4-16	G 1/2	36.5	14	27	22	0,098
5036-08-10	14-16	5/8"	7/8-14	G 1/2	37	14	27	27	0,125
5036-12-12	18-20	3/4"	1 1/16-12	G 3/4	41	16	32	32	0,27
5036-16-16	25	1"	1 5/16-12	G 1	45	18	41	41	0,4
5036-20-20	30-32	1 1/4"	1 5/8-12	G 1 1/4	55	20	50	50	0,58
5036-24-24	38	1 1/2"	1 7/8-12	G 1 1/2	57	22	55	60	0,79

1907

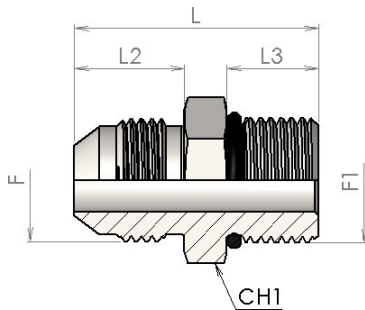

Terminale dritto M/M JIC-UNF (ISO 11926)


SDS

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L2	L3	CH1	
1907-04-04	6	1/4"	7/16-20	7/16-20	31	14	9	14	0,015
1907-04-05	6	1/4"	7/16-20	1/2-20	31	14	9	17	0,025
1907-04-06	6	1/4"	7/16-20	9/16-18	32.5	14	10	17	0,027
1907-05-05	8	5/16"	1/2-20	1/2-20	31	14	9	17	0,02
1907-05-06	8	5/16"	1/2-20	9/16-18	32	14	10	17	0,03
1907-06-06	10	3/8"	9/16-18	9/16-18	33	14	10	17	0,025
1907-06-08	10	3/8"	9/16-18	3/4-16	35	14	11	22	0,045
1907-08-08	12	1/2"	3/4-16	3/4-16	37.5	17	11	22	0,06
1907-08-10	12	1/2"	3/4-16	7/8-14	40	17	12.5	27	0,075
1907-08-12	12	1/2"	3/4-16	1 1/16-12	44.5	17	15	32	0,125
1907-10-08	14-16	5/8"	7/8-14	3/4-16	40	19	11	24	0,065
1907-10-10	14-16	5/8"	7/8-14	7/8-14	43	19	12.5	27	0,075
1907-10-12	14-16	5/8"	7/8-14	1 1/16-12	47.5	19	15	32	0,135
1907-12-10	18-20	3/4"	1 1/16-12	7/8-14	47.5	22	12.5	27	0,11
1907-12-12	18-20	3/4"	1 1/16-12	1 1/16-12	50	22	15	32	0,135
1907-12-16	18-20	3/4"	1 1/16-12	1 5/16-12	51	22	15	38	0,2
1907-16-12	25	1"	1 5/16-12	1 1/16-12	50.5	23	15	36	0,2
1907-16-16	25	1"	1 5/16-12	1 5/16-12	52	23	15	38	0,205
1907-20-20	30-32	1 1/4"	1 5/8-12	1 5/8-12	55	24	15	50	0,364
1907-24-24	38	1 1/2"	1 7/8-12	1 7/8-12	60	27.5	15	55	0,487

5190


Curva Orientabile 90° M/M JIC-UNF (ISO 11926)

SDE



Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5190-04	6	1/4"	7/16-20	7/16-20	27	22	12	14	0,037
5190-05	8	5/16"	1/2-20	1/2-20	30	24	14	17	0,047
5190-06-05	8	5/16"	1/2-20	9/16-18	33	24	14	19	0,060
5190-06	10	3/8"	9/16-18	9/16-18	33	27	14	19	0,063
5190-06-08	12	1/2"	3/4-16	9/16-18	35	32	19	19	0,13
5190-08	12	1/2"	3/4-16	3/4-16	37	32	19	24	0,16
5190-08-10	16	5/8"	7/8-14	3/4-16	40	36	22	24	0,18
5190-10	16	5/8"	7/8-14	7/8-14	43	36	22	27	0,186
5190-10-12	20	3/4"	1.1/16-12	7/8-14	46.5	42	27	27	0,297
5190-12-08	12	1/2"	3/4-16	1.1/16-12	50	37	27	19	0,290
5190-12-10	16	5/8"	7/8-14	1.1/16-12	50.5	39	27	36	0,293
5190-12	20	3/4"	1.1/16-12	1.1/16-12	50	42	27	36	0,301
5190-16	25	1"	1.5/16-12	1.5/16-12	53	46	33	41	0,426
5190-20	30-32	1.1/4"	1.5/8-12	1.5/8-12	58	52	41	50	0,674
5190-24	38	1.1/2"	1.7/8-12	1.7/8-12	63	59	50	55	0,917

5200




Curva Orientabile 45° M/M JIC-UNF (ISO 11926)

SDE45

Product number	W.P.	Ø tube		Dimension									Thread		Weight
	bar	mm	inch	F	T	C	H	E	F	F1	L	L1	CH1	CH2	kg/unit
5200-04	315	6	1/4"	7/16" - 20	7/16" - 20	19	14	11	7/16-20	7/16-20	27	20	12	14	0,034
5200-05	315	8	5/16"	1/2" - 20	1/2" - 20	22	17	14	1/2-20	1/2-20	28	21	14	17	0,042
5200-06	250	10	3/8"	9/16" - 18	9/16" - 18	22	17	14	9/16-18	9/16-18	30	21.5	14	19	0,052
5200-08	250	12	1/2"	3/4" - 16	3/4" - 16	26	22	19	3/4-16	3/4-16	33.5	26	19	24	0,104
5200-10	200	16	5/8"	7/8" - 14	7/8" - 14	30	25	22	7/8-14	7/8-14	39	29	22	27	0,157
5200-12	200	20	3/4"	1.1/16" - 12	1.1/16" - 12	32.5	32	27	1.1/16-12	1.1/16-12	44	33	27	36	0,258
5200-16	160	25	1"	1.5/16" - 12	1.5/16" - 12	39	38	35	1.5/16-12	1.5/16-12	47	37.5	33	41	0,375
5200-20	125	30-32	1.1/4"	1.5/8" - 12	1.5/8" - 12	40	48	43	1.5/8-12	1.5/8-12	48.5	40.5	41	50	0,57

5210

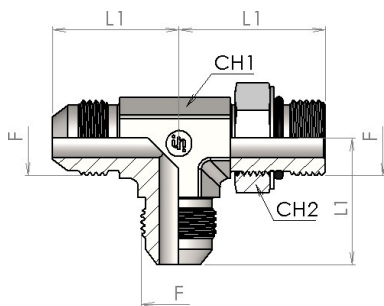


Terminale a T orientabile laterale M/M JIC-UNF (ISO 11926)

SDRT

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5210-04	6	1/4"	7/16-20	7/16-20	27	22	12	14	0,046
5210-05	8	5/16"	1/2-20	1/2-20	30	24	14	17	0,066
5210-06	10	3/8"	9/16-18	9/16-18	33	27	14	19	0,076
5210-08	12	1/2"	3/4-16	3/4-16	37	32	19	24	0,15
5210-10	16	5/8"	7/8-14	7/8-14	43	36	22	27	0,224
5210-12	20	3/4"	1.1/16-12	1.1/16-12	50	42	27	36	0,367
5210-16	25	1"	1.5/16-12	1.5/16-12	53	46	33	41	0,506
5210-20	30-32	1.1/4"	1.5/8-12	1.5/8-12	58	52	41	50	1,053
5210-24	38	1.1/2"	1.7/8-12	1.7/8-12	63	59	50	55	1,296

5220


Terminale a T orientabile centrale M/M JIC-UNF (ISO 11926)

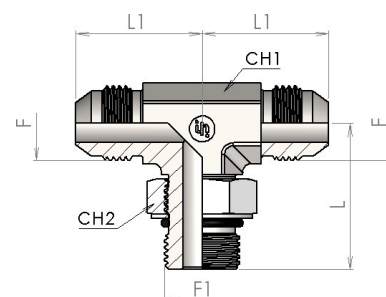SDBT

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5220-04	6	1/4"	7/16-20	7/16-20	27	22	12	14	0,046
5220-05	8	5/16"	1/2-20	1/2-20	30	24	14	17	0,066
5220-06	10	3/8"	9/16-18	9/16-18	33	27	14	19	0,076
5220-08	12	1/2"	3/4-16	3/4-16	37	32	19	24	0,15
5220-10	16	5/8"	7/8-14	7/8-14	43	36	22	27	0,224
5220-12	20	3/4"	1.1/16-12	1.1/16-12	50	42	27	36	0,367
5220-16	25	1"	1.5/16-12	1.5/16-12	53	46	33	41	0,506
5220-20	30-32	1.1/4"	1.5/8-12	1.5/8-12	58	52	41	50	1,053
5220-24	38	1.1/2"	1.7/8-12	1.7/8-12	63	59	50	55	1,296


5050

Terminale dritto F/M JIC-UNF (ISO 11926)

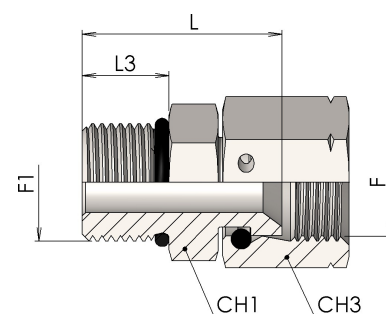SWS

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L3	CH1	CH3	
5050-04	6	1/4"	7/16-20	7/16-20	27	9	14	14	0,03
5050-05	8	5/16"	1/2-20	1/2-20	28	9	17	17	0,033
5050-06	10	3/8"	9/16-18	9/16-18	32	10	17	19	0,038
5050-08	12	1/2"	3/4-16	3/4-16	33	11	22	22	0,065
5050-10	16	5/8"	7/8-14	7/8-14	36.5	12.5	27	27	0,115
5050-12	20	3/4"	1.1/16-12	1.1/16-12	41	15	32	32	0,185
5050-16	25	1"	1.5/16-12	1.5/16-12	43.5	15	41	41	0,235
5050-20	32	1.1/4"	1.5/8-12	1.5/8-12	47	15	50	50	0,5
5050-24	38	1.1/2"	1.7/8-12	1.7/8-12	51.5	15	55	60	0,69

1910

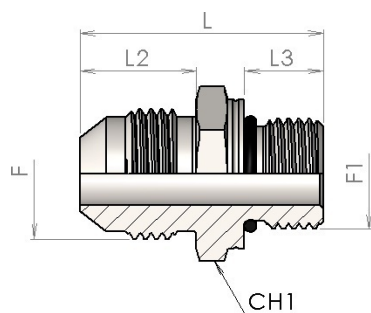


Terminale dritto M/M JIC-METRICO (ISO 6149)

SDS

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L2	L3	CH1	
1910-10-04	6	1/4"	7/16-20	M10x1	30	14	8.5	14	0,025
1910-10-05	8	5/16"	1/2-20	M10x1	30	14	8.5	14	0,03
1910-12-04	6	1/4"	7/16-20	M12x1,5	33	14	11	17	0,033
1910-12-05	8	5/16"	1/2-20	M12x1,5	32.5	14	11	17	0,037
1910-14-06	10	3/8"	9/16-18	M14x1,5	33.5	14	11	19	0,045
1910-16-06	10	3/8"	9/16-18	M16x1,5	35	14	11.5	22	0,055
1910-16-08	12	1/2"	3/4-16	M16x1,5	38	17	11.5	22	0,058
1910-18-08	12	1/2"	3/4-16	M18x1,5	39.5	17	12.5	24	0,075
1910-18-10	14-16	5/8"	7/8-14	M18x1,5	42	19	12.5	24	0,075
1910-22-10	14-16	5/8"	7/8-14	M22x1,5	43	19	13	27	0,1
1910-22-12	18-20	3/4"	1 1/16-12	M22x1,5	48	22	13	27	0,105
1910-27-12	18-20	3/4"	1 1/16-12	M27x2	49	22	16	32	0,16
1910-33-16	25	1"	1 5/16-12	M33x2	51	23	16	41	0,275
1910-42-20	30-32	1.1/4"	1 5/8-12	M42x2	54.5	24	16	50	0,435
1910-48-24	38	1.1/2"	1 7/8-12	M48x2	59	27.5	17.5	55	0,57


5038

Terminale dritto F/M JIC-METRICO (ISO 6149)

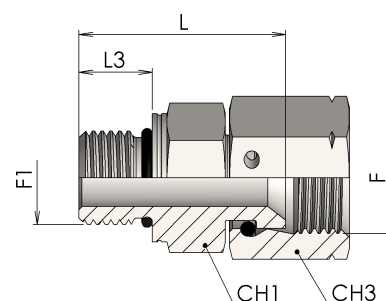SWS

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L3	CH1	CH3	
5038-10-04	6	1/4"	7/16-20	M10x1	26.5	9.5	14	14	0,025
5038-12-05	8	5/16"	1/2-20	M12x1,5	29	11	17	17	0,065
5038-14-06	10	3/8"	9/16-18	M14x1,5	31	11	19	19	0,07
5038-16-08	12	1/2"	3/4-16	M16x1,5	33	12.5	22	22	0,085
5038-18-08	12	1/2"	3/4-16	M18x1,5	35.5	14	24	22	0,095
5038-18-10	14-16	5/8"	7/8-14	M18x1,5	36	14	24	27	0,11
5038-22-10	14-16	5/8"	7/8-14	M22x1,5	38	15	27	27	0,12
5038-27-12	18-20	3/4"	1 1/16-12	M27x2	43.5	18.5	32	32	0,2
5038-33-16	25	1"	1 5/16-12	M33x2	45.5	18.5	41	41	0,25
5038-42-20	30-32	1 1/4"	1 5/8-12	M42x2	49.5	19	50	50	0,5
5038-48-24	38	1 1/2"	1 7/8-12	M48x2	54.5	21.5	55	60	0,69

5430




Curva Orientabile 90° M/M JIC-METRICO (ISO 6149)

SDE

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5430-10-04	6	1/4"	7/16-20	M10x1	29	22	12	14	0,023
5430-12-04	6	1/4"	7/16-20	M12x1.5	33	23	14	17	0,028
5430-14-06	10	3/8"	9/16-18	M14x1.5	34	27	14	19	0,036
5430-16-06	10	3/8"	9/16-18	M16x1.5	38	29.5	19	22	0,074
5430-16-08	12	1/2"	3/4-16	M16x1.5	38	32	19	22	0,077
5430-18-08	12	1/2"	3/4-16	M18x1.5	41	32	19	24	0,078
5430-18-10	16	5/8"	7/8-14	M18x1.5	42	37	22	24	0,139
5430-22-10	16	5/8"	7/8-14	M22x1.5	43	36	22	27	0,119
5430-22-12	20	3/4"	1.1/16-12	M22x1.5	47.5	42	27	27	0,234
5430-27-12	20	3/4"	1.1/16-12	M27x2	52	42	27	32	0,208
5430-33-16	25	1"	1.5/16-12	M33x2	54	46	33	41	0,333
5430-42-20	30	1.1/4"	1.5/8-12	M42x2	60	52	41	50	0,575


5440

**Curva Orientabile 45° M/M JIC-
METRICO (ISO 6149)**

SDE45

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5440-10-04	6	1/4"	7/16-20	M10x1	27	21	12	14	0,017
5440-12-04	6	1/4"	7/16-20	M12x1.5	30	21.5	14	17	0,025
5440-12-05	8	5/16"	1/2-20	M12x1.5	31	22	14	17	0,037
5440-14-06	10	3/8"	9/16-18	M14x1.5	32	21.5	14	19	0,031
5440-16-08	12	1/2"	3/4-16	M16x1.5	34	26	19	22	0,065
5440-18-08	12	1/2"	3/4-16	M18x1.5	36	26	19	24	0,066
5440-22-10	16	5/8"	7/8-14	M22x1.5	38	29	22	27	0,099
5440-27-12	20	3/4"	1.1/16-12	M27x2	45	33	27	32	0,173
5440-33-16	25	1"	1.5/16-12	M33x2	48	37.5	33	41	0,287
5440-42-20	30	1.1/4"	1.5/8-12	M42x2	48.5	40.5	41	50	0,482
5440-48-24	38	1.1/2"	1.7/8-12	M48X2	55	45.5	50	55	0,836

5450

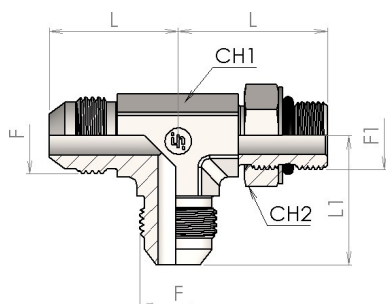


Terminale a T orientabile laterale M/M JIC-METRICO (ISO 6149)

SDRT

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5450-10-04	6	1/4"	7/16-20	M10x1	29	22	12	14	0,027
5450-12-05	8	5/16"	1/2-20	M12x1.5	33	24	14	17	0,053
5450-14-06	10	3/8"	9/16-18	M14x1.5	34	27	14	19	0,053
5450-16-08	12	1/2"	3/4-16	M16x1.5	38	32	19	22	0,095
5450-18-08	12	1/2"	3/4-16	M18x1.5	41	32	19	24	0,114
5450-22-10	16	5/8"	7/8-14	M22x1.5	43	36	22	27	0,175
5450-27-12	20	3/4"	1.1/16-12	M27x2	52	42	27	32	0,304
5450-33-16	25	1"	1.5/16-12	M33x2	54	46	33	41	0,491
5450-42-20	30	1.1/4"	1.5/8-12	M42x2	60	52	41	50	0,772
5450-48-24	38	1.1/2"	1.7/8-12	M48x2	67	59	50	55	1,069


5455

Terminale a T orientabile centrale M/M JIC-METRICO (ISO 6149)

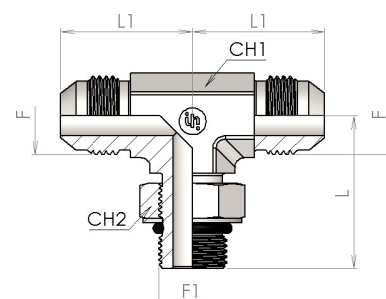SDBT

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5455-10-04	6	1/4"	7/16-20	M10x1	29	22	12	14	0,027
5455-12-05	8	5/16"	1/2-20	M12x1.5	33	24	14	17	0,053
5455-14-06	10	3/8"	9/16-18	M14x1.5	34	27	14	19	0,053
5455-16-08	12	1/2"	3/4-16	M16x1.5	38	32	19	22	0,095
5455-18-08	12	1/2"	3/4-16	M18x1.5	41	32	19	24	0,114
5455-22-10	16	5/8"	7/8-14	M22x1.5	43	36	22	27	0,175
5455-27-12	20	3/4"	1.1/16-12	M27x2	52	42	27	32	0,304
5455-33-16	25	1"	1.5/16-12	M33x2	54	46	33	41	0,491
5455-42-20	30	1.1/4"	1.5/8-12	M42x2	60	52	41	50	0,772
5455-48-24	38	1.1/2"	1.7/8-12	M48x2	67	59	50	55	1,069

1777

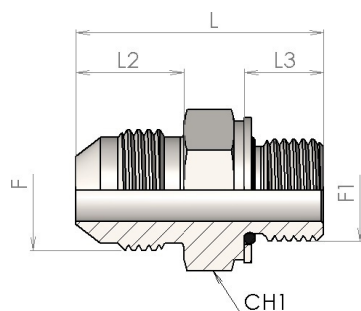


Terminale dritto M/M JIC-METRICO con o-ring ed anello

SDS

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L2	L3	CH1	
1777-10-04	6	1/4"	7/16-20	M10x1	30	14	9	14	0,025
1777-10-05	8	5/16"	1/2-20	M10x1	30	14	9	14	0,025
1777-12-04	6	1/4"	7/16-20	M12x1,5	32.5	14	11.5	17	0,035
1777-12-05	8	5/16"	1/2-20	M12x1,5	32.5	14	11.5	17	0,035
1777-14-06	10	3/8"	9/16-18	M14x1,5	33.5	14	11.5	19	0,035
1777-16-06	10	3/8"	9/16-18	M16x1,5	34.5	14	12.5	22	0,05
1777-16-08	12	1/2"	3/4-16	M16x1,5	37.5	17	12.5	22	0,055
1777-18-08	12	1/2"	3/4-16	M18x1,5	39.5	17	13.5	24	0,065
1777-18-10	14-16	5/8"	7/8-14	M18x1,5	42	19	13.5	24	0,07
1777-22-10	14-16	5/8"	7/8-14	M22x1,5	44.5	19	15	27	0,09
1777-22-12	18-20	3/4"	1 1/16-12	M22x1,5	48	22	15	27	0,1
1777-27-12	18-20	3/4"	1 1/16-12	M27x2	52.5	22	18.5	32	0,155
1777-33-16	25	1"	1 5/16-12	M33x2	54	23	18.5	41	0,265
1777-42-20	30-32	1 1/4"	1 5/8-12	M42x2	58	24	19.5	50	0,425
1777-48-24	38	1 1/2"	1 7/8-12	M48x2	65	27.5	21.5	55	0,545


5400

Curva Orientabile 90° M/M JIC- METRICO con o-ring ed anello

SDE

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5400-10-04	6	1/4"	7/16-20	M10x1	29	22	12	14	0,023
5400-10-05	8	5/16"	1/2-20	M10x1	31	24	14	14	0,029
5400-12-04	6	1/4"	7/16-20	M12x1.5	33	23	14	17	0,028
5400-12-05	8	5/16"	1/2-20	M12x1.5	33	24	14	17	0,029
5400-14-05	8	5/16"	1/2-20	M14x1.5	34	24	14	19	0,03
5400-14-06	10	3/8"	9/16-18	M14x1.5	34	27	14	19	0,036
5400-16-06	10	3/8"	9/16-18	M16x1.5	38	29.5	19	22	0,074
5400-16-08	12	1/2"	3/4-16	M16x1.5	38	32	19	22	0,077
5400-18-08	12	1/2"	3/4-16	M18x1.5	41	32	19	24	0,078
5400-18-10	16	5/8"	7/8-14	M18x1.5	42	36	22	24	0,104
5400-22-10	16	5/8"	7/8-14	M22x1.5	43	36	22	27	0,119
5400-22-12	20	3/4"	1.1/16-12	M22x1.5	47.5	42	27	27	0,198
5400-27-12	20	3/4"	1.1/16-12	M27x2	52	42	27	32	0,208
5400-27-16	25	1"	1.5/16-12	M27x2	53	46	33	32	0,333
5400-33-16	25	1"	1.5/16-12	M33x2	54	46	33	41	0,333
5400-42-20	30	1.1/4"	1.5/8-12	M42x2	60	52	41	50	0,575
5400-48-24	38	1.1/2"	1.7/8-12	M48x2	67	59	50	55	0,872

5410




Curva Orientabile 45° M/M JIC-METRICO con o-ring e anello

SDE45

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5410-10-04	6	1/4"	7/16-20	M10x1	27	21	12	14	0,023
5410-12-04	6	1/4"	7/16-20	M12x1.5	30	21.5	14	17	0,025
5410-12-05	8	5/16"	1/2-20	M12x1.5	30	21.5	14	17	0,028
5410-14-06	10	3/8"	9/16-18	M14x1.5	32	21.5	14	19	0,036
5410-16-08	12	1/2"	3/4-16	M16x1.5	34	26	19	22	0,068
5410-18-08	12	1/2"	3/4-16	M18x1.5	36	26	19	24	0,078
5410-22-10	16	5/8"	7/8-14	M22x1.5	38	29	22	27	0,119
5410-27-12	20	3/4"	1.1/16-12	M27x2	45	33	27	32	0,208
5410-33-16	25	1"	1.5/16-12	M33x2	48	37.5	33	41	0,287
5410-42-20	30	1.1/4"	1.5/8-12	M42x2	48,5	40,5	41	50	0,575
5410-48-24	38	1.1/2"	1.7/8-12	M48x2	55	45.5	50	55	0,842


5420

**Terminale a T orientabile laterale
M/M JIC-METRICO con o-ring ed
anello**

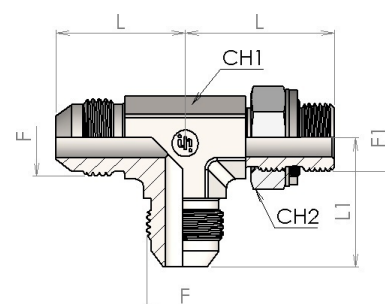SDRT

Product number	Ø tube		Thread		Dimension				Weight
	mm	inch	F	F1	L	L1	CH1	CH2	kg/unit
5420-10-04	6	1/4"	7/16-20	M10x1	29	22	12	14	0,027
5420-12-05	8	5/16"	1/2-20	M12x1.5	33	24	14	17	0,042
5420-14-06	10	3/8"	9/16-18	M14x1.5	34	27	14	19	0,053
5420-16-08	12	1/2"	3/4-16	M16x1.5	38	32	19	22	0,113
5420-18-08	12	1/2"	3/4-16	M18x1.5	41	32	19	24	0,114
5420-22-10	16	5/8"	7/8-14	M22x1.5	43	36	22	27	0,175
5420-27-12	20	3/4"	1.1/16-12	M27x2	52	42	27	32	0,304
5420-33-16	25	1"	1.5/16-12	M33x2	54	46	33	41	0,530
5420-42-20	30	1.1/4"	1.5/8-12	M42x2	60	52	41	50	0,772
5420-48-24	38	1.1/2"	1.7/8-12	M48x2	67	59	50	55	1,069

5425

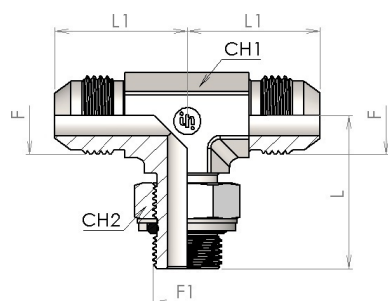


Terminale a T orientabile centrale M/M JIC-METRICO con o-ring ed anello

SDBT

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	CH2	
5425-10-04	6	1/4"	7/16-20	M10x1	29	22	12	14	0,027
5425-12-05	8	5/16"	1/2-20	M12x1.5	33	24	14	17	0,042
5425-14-06	10	3/8"	9/16-18	M14x1.5	34	27	14	19	0,053
5425-16-08	12	1/2"	3/4-16	M16x1.5	38	32	19	22	0,095
5425-18-08	12	1/2"	3/4-16	M18x1.5	41	32	19	24	0,114
5425-22-10	16	5/8"	7/8-14	M22x1.5	43	36	22	27	0,175
5425-27-12	20	3/4"	1.1/16-12	M27x2	52	42	27	32	0,304
5425-33-16	25	1"	1.5/16-12	M33x2	54	46	33	41	0,530
5425-42-20	30	1.1/4"	1.5/8-12	M42x2	60	52	41	50	0,772
5425-48-24	38	1.1/2"	1.7/8-12	M48x2	67	59	50	55	1,069


1775

Terminale dritto M/M JIC-METRICO (Form E ISO 9974-2)

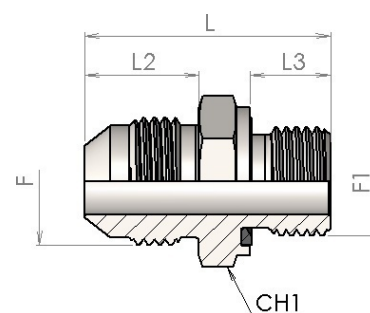SDS

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L2	L3	CH1	
1775-10-04	6	1/4"	7/16-20	M10x1	30	14	8	14	0,02
1775-10-05	8	5/16"	1/2-20	M10x1	30	14	8	14	0,017
1775-12-04	6	1/4"	7/16-20	M12x1,5	34	14	12	17	0,03
1775-12-05	8	5/16"	1/2-20	M12x1,5	34	14	12	17	0,028
1775-14-06	10	3/8"	9/16-18	M14x1,5	34	14	12	19	0,037
1775-16-06	10	3/8"	9/16-18	M16x1,5	36	14	12	22	0,05
1775-16-08	12	1/2"	3/4-16	M16x1,5	39	17	12	22	0,055
1775-18-08	12	1/2"	3/4-16	M18x1,5	39	17	12	24	0,07
1775-18-10	14-16	5/8"	7/8-14	M18x1,5	42	19	12	24	0,105
1775-22-10	14-16	5/8"	7/8-14	M22x1,5	45	19	14	27	0,16
1775-22-12	18-20	3/4"	1 1/16-12	M22x1,5	48	22	14	27	0,27
1775-27-12	18-20	3/4"	1 1/16-12	M27x2	51	22	16	32	0,43
1775-33-16	25	1"	1 5/16-12	M33x2	55	23	18	41	0,43
1775-42-20	30-32	1 1/4"	1 5/8-12	M42x2	60	24	20	50	0,435
1775-48-24	38	1 1/2"	1 7/8-12	M48x2	67	27,5	22	55	0,58


5037

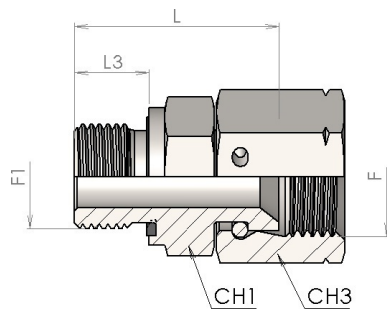

Terminale dritto F/M JIC-METRICO (Form E ISO 9974-2)


SWS

Product number	Ø tube		Dimension										Thread		Weight
	mm	inch	F	T	B	D	H	E	F	F1	L	L3	CH1	CH3	kg/unit
5037-10-04	6	1/4"	7/16"-20	M10x1	8	24.5	14	14	7/16-20	M10x1	25	8	14	14	0,028
5037-12-05	8	5/16"	1/2"-20	M12x1,5	8	26	17	17	1/2-20	M12x1,5	30	12	17	17	0,032
5037-14-06	10	3/8"	9/16"-18	M14x1,5	12	26.8	19	19	9/16-18	M14x1,5	32	12	19	19	0,042
5037-16-08	12	1/2"	3/4"-16	M16x1,5	12	29.6	22	22	3/4-16	M16x1,5	32.5	12	22	22	0,062
5037-18-08	12	1/2"	3/4"-16	M18x1,5	12	30.6	22	24	3/4-16	M18x1,5	33.5	12	24	22	0,07
5037-18-10	14-16	5/8"	7/8"-14	M18x1,5	12	34.6	27	24	7/8-14	M18x1,5	34	12	24	27	0,125
5037-22-10	14-16	5/8"	7/8"-14	M22x1,5	14	36.1	27	29	7/8-14	M22x1,5	37	14	27	27	0,155
5037-27-12	18-20	3/4"	1.1/16"-12	M27x2	16	36.7	32	32	11/16-12	M27x2	41	16	32	32	0,175
5037-33-16	25	1"	1.5/16"-12	M33x2	18	41.4	41	41	15/16-12	M33x2	43	18	41	41	0,26
5037-42-20	30-32	1.1/4"	1.5/8"-12	M42x2	20	43.8	50	50	15/8-12	M42x2	50.5	20	50	50	0,485

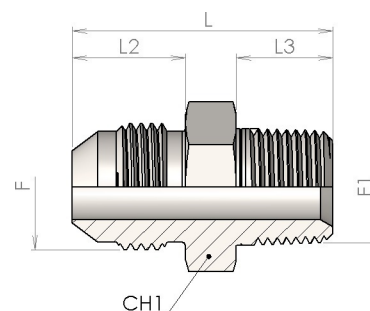1906**Terminale dritto M/M JIC-NPTF****SDS**

Product number	Ø tube		Thread		Dimension				Weight
	mm	inch	F	F1	L	L2	L3	CH1	kg/unit
1906-02-04	6	1/4"	7/16-20	1/8-27 NPTF	30	14	10	12	0,014
1906-02-05	8	5/16"	1/2-20	1/8-27 NPTF	31	14	10	14	0,017
1906-04-04	6	1/4"	7/16-20	1/4-18 NPTF	36	14	14.5	15	0,025
1906-04-05	8	5/16"	1/2-20	1/4-18 NPTF	36	14	14.5	15	0,025
1906-04-06	10	3/8"	9/16-18	1/4-18 NPTF	36	14	14.5	17	0,027
1906-06-06	10	3/8"	9/16-18	3/8-18 NPTF	35	14	14.5	19	0,03
1906-06-08	12	1/2"	3/4-16	3/8-18 NPTF	37.5	17	14.5	22	0,045
1906-06-10	16	5/8"	7/8-14	3/8-18 NPTF	43	19	14.5	24	0,063
1906-08-08	12	1/2"	3/4-16	1/2-14 NPTF	43.5	17	19	22	0,074
1906-08-10	16	5/8"	7/8-14	1/2-14 NPTF	48	19	19	24	0,077
1906-12-10	16	5/8"	7/8-14	3/4-14 NPTF	49.5	19	19	27	0,12
1906-12-12	20	3/4"	1 1/16-12	3/4-14 NPTF	52.5	22	19	27	0,12
1906-16-16	25	1"	1 5/16-12	1-11 1/2 NPTF	58.5	23	24	36	0,19
1906-20-20	32	1 1/4"	1 5/8-12	1 1/4-11 1/2 NPTF	60.5	24	24.6	46	0,315
1906-24-24	38	1 1/2"	1 7/8-12	1 1/2-11 1/2 NPTF	66	27.5	25.5	50	0,43
1906-32-32	50	2"	2 1/2-12	2-11 1/2 NPTF	77.6	33.9	26.2	65	0,774


5140



Terminale a 90° M/M JIC-NPTF


SDE

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	
5140-02-04	6	1/4"	7/16-20	1/8-27 NPTF	19.5	22	12	0,023
5140-02-05	8	5/16"	1/2-20	1/8-27 NPTF	24.5	24	14	0,029
5140-04-04	6	1/4"	7/16-20	1/4-18 NPTF	27.5	23	14	0,042
5140-04-05	8	5/16"	1/2-20	1/4-18 NPTF	27.5	24	14	0,042
5140-04-06	10	3/8"	9/16-18	1/4-18 NPTF	27.5	27	14	0,045
5140-06-06	10	3/8"	9/16-18	3/8-18 NPTF	31	29.5	19	0,076
5140-06-08	12	1/2"	3/4-16	3/8-18 NPTF	31	32	19	0,086
5140-06-10	14-16	5/8"	7/8-14	3/8-18 NPTF	33.5	36	22	0,127
5140-08-06	10	3/8"	9/16-18	1/2-14 NPTF	36	31.5	22	0,117
5140-08-08	12	1/2"	3/4-16	1/2-14 NPTF	36	34	22	0,125
5140-08-10	14-16	5/8"	7/8-14	1/2-14 NPTF	36	36	22	0,129
5140-08-12	18-20	3/4"	1.1/16-12	1/2-14 NPTF	38	42	27	0,204
5140-12-08	12	1/2"	3/4-16	3/4-14 NPTF	40.5	37	27	0,19
5140-12-10	14-16	5/8"	7/8-14	3/4-14 NPTF	40.5	39	27	0,192
5140-12-12	18-20	3/4"	1.1/16-12	3/4-14 NPTF	40.5	42	27	0,198
5140-16-16	25	1"	1.5/16-12	1-11.1/2 NPTF	50	46	33	0,328
5140-20-20	30-32	1.1/4"	1.5/8-12	1.1/4-11.1/2 NPTF	60.5	52	41	0,549
5140-24-24	38	1.1/2"	1.7/8-12	1.1/2-11.1/2 NPTF	67	59	50	0,747

5150**Terminale a 45° M/M JIC-NPTF****SDE45**

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	
5150-02-04	6	1/4"	7/16-20	1/8-27 NPTF	16.5	18.5	12	0,02
5150-02-05	8	5/16"	1/2-20	1/8-27 NPTF	16.5	19.5	14	0,025
5150-04-04	6	1/4"	7/16-20	1/4-18 NPTF	22	21	14	0,03
5150-04-05	8	5/16"	1/2-20	1/4-18 NPTF	22	21	14	0,03
5150-04-06	10	3/8"	9/16-18	1/4-18 NPTF	22	21	14	0,027
5150-06-06	10	3/8"	9/16-18	3/8-18 NPTF	24	22	19	0,052
5150-06-08	12	1/2"	3/4-16	3/8-18 NPTF	24	25	19	0,06
5150-06-10	14-16	5/8"	7/8-14	3/8-18 NPTF	25	28	22	0,095
5150-08-08	12	1/2"	3/4-16	1/2-14 NPTF	29.5	25	22	0,092
5150-08-10	14-16	5/8"	7/8-14	1/2-14 NPTF	29.5	28	22	0,092
5150-08-12	18-20	3/4"	1.1/16-12	1/2-14 NPTF	30.5	32.5	27	0,145
5150-12-12	18-20	3/4"	1.1/16-12	3/4-14 NPTF	30.5	32.5	27	0,15
5150-16-16	25	1"	1.5/16-12	1-11.1/2 NPTF	37.5	37	33	0,24
5150-20-20	30-32	1.1/4"	1.5/8-12	1.1/4-11.1/2 NPTF	42.5	40.5	41	0,385

5160

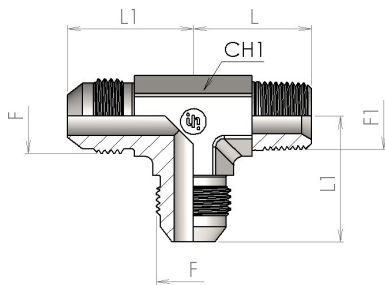

Terminale a T laterale M/M JIC-NPTF


SDRT

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	
5160-02-04	6	1/4"	7/16-20	1/8-27 NPTF	19.5	22	12	0,031
5160-04-04	6	1/4"	7/16-20	1/4-18 NPTF	27.5	23	14	0,049
5160-04-06	10	3/8"	9/16-18	1/4-18 NPTF	27.5	27	14	0,057
5160-06-06	10	3/8"	9/16-18	3/8-18 NPTF	31	29.5	22	0,077
5160-06-08	12	1/2"	3/4-16	3/8-18 NPTF	31	32	19	0,113
5160-08-08	12	1/2"	3/4-16	1/2-16 NPTF	36	34	19	0,164
5160-08-10	14-16	5/8"	7/8-14	1/2-14 NPTF	36	36	22	0,173
5160-12-12	18-20	3/4"	1.1/16-12	3/4-14 NPTF	40.5	42	27	0,272
5160-16-16	25	1"	1.5/16-12	1-11.1/2 NPTF	50	46	33	0,413
5160-20-20	30-32	1.1/4"	1.5/8-12	1.1/4-11.1/2 NPTF	60.5	52	41	0,681
5160-24-24	38	1.1/2"	1.7/8-12	1.1/2-11.1/2 NPTF	67	59	50	0,905

5170


**Terminale a T centrale M/M JIC-
NPTF**

SDBT

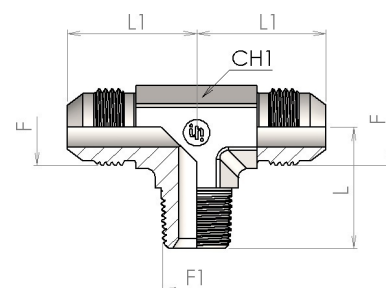

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	
5170-02-04	6	1/4"	7/16-20	1/8-27 NPTF	19.5	22	12	0,031
5170-04-04	6	1/4"	7/16-20	1/4-18 NPTF	27.5	23	14	0,049
5170-04-06	10	3/8"	9/16-18	1/4-18 NPTF	27.5	27	14	0,057
5170-06-06	10	3/8"	9/16-18	3/8-18 NPTF	31	29.5	19	0,077
5170-06-08	12	1/2"	3/4-16	3/8-18 NPTF	31	32	19	0,113
5170-08-08	12	1/2"	3/4-16	1/2-14 NPTF	36	34	22	0,164
5170-08-10	14-16	5/8"	7/8-14	1/2-14 NPTF	36	36	22	0,173
5170-12-12	18-20	3/4"	1.1/16-12	3/4-14 NPTF	40.5	42	27	0,272
5170-16-16	25	1"	1.5/16-12	1-11.1/2 NPTF	50	46	33	0,413
5170-20-20	30-32	1.1/4"	1.5/8-12	1.1/4-11.1/2 NPTF	60.5	52	41	0,681
5170-24-24	38	1.1/2"	1.7/8-12	1.1/2-11.1/2 NPTF	67	59	50	0,905


5180

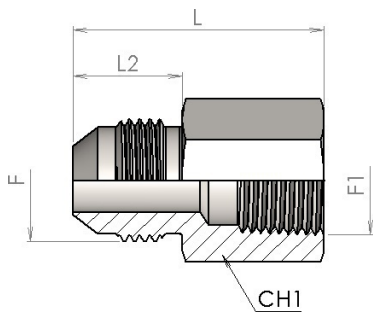

Terminale dritto M/F fissa JIC-NPTF


SWS

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L2	CH1	
5180-02-04	6	1/4"	7/16-20	1/8-27 NPTF	30	14	14	0,045
5180-04-06	10	3/8"	9/16-18	1/4-18 NPTF	35.5	14	19	0,04
5180-06-06	10	3/8"	9/16-18	3/8-18 NPTF	36.5	14	22	0,065
5180-06-08	12	1/2"	3/4-16	3/8-18 NPTF	39.5	17	22	0,045
5180-08-10	16	5/8"	7/8-14	1/2-14 NPTF	48	19.5	30	0,125
5180-12-12	20	3/4"	1.1/16-12	3/4-14 NPTF	52.5	22	36	0,19
5180-16-16	25	1"	1.5/16-12	1-11.1/2 NPTF	59.5	23	41	0,28
5180-20-20	30-32	1.1/4"	1.5/8-12	1.1/4-1.1/2 NPTF	63	24.5	50	0,41
5180-24-24	38	1.1/2"	1.7/8-12	1.1/2-1.1/2 NPTF	66.5	27.5	60	0,37

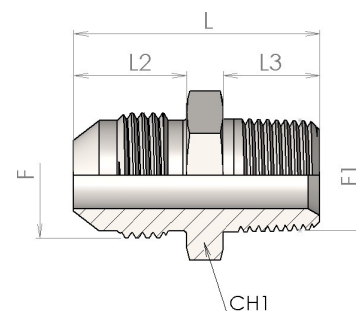1903**Giunzione M/M Jic/Gas Conico**

Product number	Ø tube		Thread		Dimension				Weight kg/unit
	mm	inch	F	F1	L	L2	L3	CH1	
1903-02-04	6	1/4"	7/16-20	1/8-28 BSPT	30	14	10	12	0,014
1903-02-05	8	5/16"	1/2-20	1/8-28 BSPT	31	14	10	14	0,017
1903-04-04	6	1/4"	7/16-20	1/4-19 BSPT	36	14	14.5	14	0,025
1903-04-05	8	5/16"	1/2-20	1/4-19 BSPT	36	14	14.5	14	0,025
1903-04-06	10	3/8"	9/16-18	1/4-19 BSPT	36	14	14.5	17	0,030
1903-06-06	10	3/8"	9/16-18	3/8-19 BSPT	36	14	14.5	19	0,027
1903-06-08	12	1/2"	3/4-16	3/8-19 BSPT	37.5	17	14.5	19	0,045
1903-06-10	14-16	5/8"	7/8-14	3/8-19 BSPT	43	19	14.5	24	0,063
1903-08-08	12	1/2"	3/4-16	1/2-14 BSPT	43.5	17	19	22	0,074
1903-08-10	14-16	5/8"	7/8-14	1/2-14 BSPT	48	19	19	24	0,077
1903-12-12	20	3/4"	1.1/16-12	3/4-14 BSPT	52.5	22	19	27	0,120
1903-16-12	20	3/4"	1.1/16-12	1-11 BSPT	56	22	24	36	0,175
1903-16-16	25	1"	1.5/16-12	1-11 BSPT	58.5	23	24	36	0,190
1903-20-20	32	1.1/4"	1.5/8-12	1.1/4-11 BSPT	60.5	24	24.5	46	0,315
1903-24-24	38	1.1/2"	1.7/8-12	1.1/2-11 BSPT	66	27.5	25.5	50	0,430


5165



Terminale a 90° M/M JIC-BSPT


SDE

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	
5165-02-04	6	1/4"	7/16-20	1/8-28 BSPT	23	24	14	0,02
5165-02-05	8	5/16"	1/2-20	1/8-28 BSPT	23.5	24	14	0,029
5165-04-04	6	1/4"	7/16-20	1/4-19 BSPT	27.5	23	14	0,042
5165-04-05	8	5/16"	1/2-20	1/4-19 BSPT	27.5	24	14	0,042
5165-04-06	10	3/8"	9/16-18	1/4-19 BSPT	27.5	27	14	0,045
5165-06-06	10	3/8"	9/16-18	3/8-19 BSPT	32	29	19	0,076
5165-06-08	12	1/2"	3/4-16	3/8-19 BSPT	32	31	19	0,086
5165-08-06	10	3/8"	9/16-18	1/2-14 BSPT	36	31.5	22	0,117
5165-08-08	12	1/2"	3/4-16	1/2-14 BSPT	36	33.5	22	0,125
5165-08-10	14-16	5/8"	7/8-14	1/2-14 BSPT	36	36	22	0,129
5165-12-12	18-20	3/4"	1.1/16-12	3/4-14 BSPT	42.5	42	27	0,198
5165-16-16	25	1"	1.5/16-12	1-11 BSPT	50	46	33	0,328

5265**Terminale a 45° M/M JIC-BSPT****SDE45**

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	
5265-02-04	6	1/4"	7/16-20	1/8-28 BSPT	16.5	18.5	12	0,02
5265-02-05	8	5/16"	1/2-20	1/8-28 BSPT	16.5	19.5	14	0,025
5265-04-04	6	1/4"	7/16-20	1/4-19 BSPT	22	21	14	0,03
5265-04-05	8	5/16"	1/2-20	1/4-19 BSPT	22	21	14	0,03
5265-04-06	10	3/8"	9/16-18	1/4-19 BSPT	22	21	14	0,027
5265-06-06	10	3/8"	9/16-18	3/8-19 BSPT	24	22	19	0,052
5265-06-08	12	1/2"	3/4-16	3/8-19 BSPT	24	25	19	0,06
5265-08-08	12	1/2"	3/4-16	1/2-14 BSPT	29.5	25	22	0,092
5265-08-10	14-16	5/8"	7/8-14	1/2-14 BSPT	29.5	28	22	0,092
5265-12-12	18-20	3/4"	1.1/16-12	3/4-14 BSPT	30.5	32.5	27	0,15
5265-16-16	25	1"	1.5/16-12	1-11 BSPT	37.5	37	33	0,24

5275

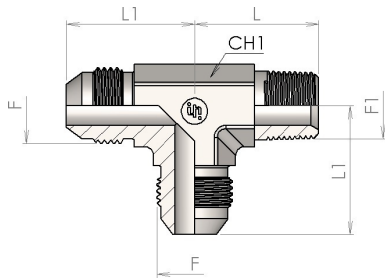


Terminale a T laterale M/M JIC-BSPT

SDRT

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	
5275-02-04	6	1/4"	7/16-20	1/8-28 BSPT	19.5	22	12	0,03
5275-04-04	6	1/4"	7/16-20	1/4-19 BSPT	27.5	23	14	0,052
5275-04-06	10	3/8"	9/16-18	1/4-19 BSPT	27.5	27	14	0,055
5275-06-08	12	1/2"	3/4-16	3/8-19 BSPT	32	31	19	0,111
5275-08-08	12	1/2"	3/4-16	1/2-14 BSPT	36	33.5	22	0,163
5275-08-10	14-16	5/8"	7/8-14	1/2-14 BSPT	36	36	22	0,169
5275-12-12	18-20	3/4"	1.1/16-12	3/4-14 BSPT	42.5	42	27	0,267
5275-16-16	25	1"	1.5/16-12	1-11 BSPT	50	46	33	0,407


5280

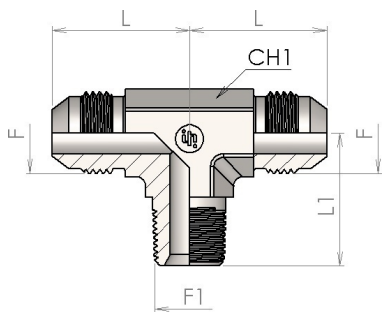

Terminale a T centrale M/M JIC-BSPT


SDBT

Product number	Ø tube		Thread		Dimension			Weight kg/unit
	mm	inch	F	F1	L	L1	CH1	
5280-02-04	6	1/4"	7/16-20	1/8-28 BSPT	19.5	22	12	0,03
5280-04-04	6	1/4"	7/16-20	1/4-19 BSPT	27.5	23	14	0,052
5280-04-06	10	3/8"	9/16-18	1/4-19 BSPT	27.5	27	14	0,055
5280-06-08	12	1/2"	3/4-16	3/8-19 BSPT	32	31	19	0,111
5280-08-08	12	1/2"	3/4-16	1/2-14 BSPT	36	33.5	22	0,163
5280-08-10	14-16	5/8"	7/8-14	1/2-14 BSPT	36	36	22	0,169
5280-12-12	18-20	3/4"	1.1/16-12	3/4-14 BSPT	42.5	42	27	0,267
5280-16-16	25	1"	1.5/16-12	1-11 BSPT	50	46	33	0,407

J605**Tappo maschio JIC (ISO 8434-2)****PL**

Product number	Ø tube		Thread	Dimension			Weight
	mm	inch	F	L	L2	CH1	kg/unit
J605-04	6	1/4"	7/16-20	20.5	14	12	0,01
J605-05	8	5/16"	1/2-20	20.5	14	14	0,014
J605-06	10	3/8"	9/16-18	21.5	14	17	0,02
J605-08	12	1/2"	3/4-16	24	17	22	0,04
J605-10	14-16	5/8"	7/8-14	28	19	24	0,06
J605-12	18-20	3/4"	1 1/16-12	32.5	22	30	0,095
J605-16	25	1"	1 5/16-12	34	23	36	0,1
J605-20	30-32	1 1/4"	1 5/8-12	37	24	46	0,27
J605-24	38	1 1/2"	1 7/8-12	42	27.5	50	0,36
J605-32	50	2"	2 1/2-12	55	34	65	0,47

J608




Tappo femmina JIC (ISO 8434-2)

PL

Product number	Ø tube		Thread	Dimension			Weight
	mm	inch	F	L	L1	CH3	kg/unit
J608-04	6	1/4"	7/16-20	18.5	9.5	14	0,014
J608-05	8	5/16"	1/2-20	19.5	10	17	0,019
J608-06	10	3/8"	9/16-18	20.5	11.5	19	0,031
J608-08	12	1/2"	3/4-16	24	13.5	22	0,045
J608-10	16	5/8"	7/8-14	27.5	14,5	27	0,075
J608-12	20	3/4"	1 1/16-12	29.5	16	32	0,114
J608-16	32	1 1/4"	1 5/16-12	33	17	41	0,272
J608-20	38	1 1/2"	1 5/8-12	36.5	20.5	50	0,553
J608-24	50	2"	1 7/8-12	42	23	60	0,93

5040




Tappo maschio SAE (ISO 11926-1)

PL

Product number	Ø tube		Thread	Dimension			Weight
	mm	inch	F	L	L2	CH1	kg/unit
5040-04	6	1/4"	7/16-20	17	9	14	0,013
5040-05	8	5/16"	1/2-20	17	9	17	0,019
5040-06	10	3/8"	9/16-18	18.5	10	17	0,022
5040-08	12	1/2"	3/4-16	20.5	11	22	0,044
5040-10	14-16	5/8"	7/8-14	23.5	13	27	0,053
5040-12	18-20	3/4"	1 1/16-12	28	15	32	0,117
5040-16	25	1"	1 5/16-12	28.5	15	38	0,141

MJ

Terminale dritto maschio JIC a saldare con tasca (ISO 8434-2)

BRS

Product number	Ø tube		Thread	Dimension						Weight
	mm	inch	F	Q	P	L	L2	CH1	kg/unit	
MJ-05-10	8	5/16"	1/2-20	10	8.5	26	14	17	0,020	
MJ-06-10	10	3/8"	9/16-18	10	8.5	27.5	14	19	0,034	
MJ-06-12	10	3/8"	9/16-18	12	8.5	27.5	14	19	0,030	
MJ-08-12	12	1/2"	3/4-16	12	8.5	29	17	22	0,047	
MJ-10-16	14-16	5/8"	7/8-14	16	9	31.5	19	24	0,058	
MJ-12-18	18-20	3/4"	1 1/16-12	18	12.5	40	22	30	0,118	
MJ-12-20	18-20	3/4"	1 1/16-12	20	12.5	40	22	30	0,116	
MJ-16-25	25	1"	1 5/16-12	25	14	42	23	36	0,161	